LED HIGH BAY



▼ Charaterastic

Power Up Any Space

1.Durable & Efficient: Built-to-last design & LEDs deliver long life (50,000 hrs) & high output (up to 130~180 lm/W).

2.Sharp Focus, Happy Eyes: Precise optics provide bright, comfortable light with glare control.

3. Future-Proof Smart Control: Integrates with Interact software for adaptable lighting management.

4. Versatile Applications: Ideal for warehouses, factories, stores, restaurants, sports centers, and more.

+Loop, ceiling mounting and wall mounting

+Working temperature is -50°C to 70°C



Application


I+Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is availble, Pls confirm before ordering.

0-10V



▼ Family Matrix (Five difference size)




D (mm)	H (mm)	Watt
φ 225	150	60/100W
φ 265	150	150W
φ 300	150	200W
φ 460	140	300W
φ 490	140	400W

Photos

Installation Method



TTY YI MIHIND DATA




RIDILUX LIGHTING info@ridilux.com

▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	ССТ (К)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W		
HB-03A-60	φ225XH150mm	60 W	>80	3000-6000K	7650 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	2.00 kgs		
HB-03A-100	φ225XH150mm	100 W	>80	3000-6000K	12820 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	2.10 kgs		
HB-03B-150	φ265XH150mm	150 W	>80	3000-6000K	19320 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	2.70 kgs		
HB-03C-200	φ300XH150mm	200 W	>80	3000-6000K	25820 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	3.20 kgs		
HB-03D-300	φ460XH140mm	300 W	>80	3000-6000K	45000 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	4.50 kgs		
HB-03E-400	φ490XH140mm	400 W	>80	3000-6000K	60000 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	4.90 kgs		
I✦Notes: 1. Finish: Black												

2. It has five different sizes from 60-400W.

▼ Naming scheme

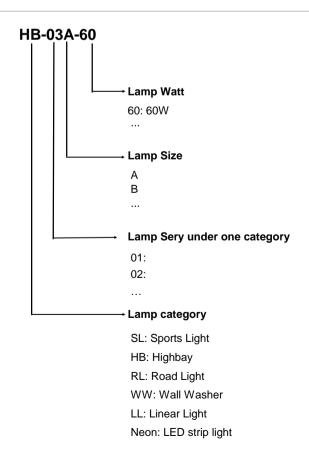

LED HIGH BAY



Charaterastic

Power Up Any Space


1.Durable & Efficient: Built-to-last design & LEDs deliver long life (50,000 hrs) & high output (up to 130~180 lm/W).

2.Sharp Focus, Happy Eyes: Precise optics provide bright, comfortable light with glare control.

3. Future-Proof Smart Control: Integrates with Interact software for adaptable lighting management.

4. Versatile Applications: Ideal for warehouses, factories, stores, restaurants, sports centers, and more.

+Loop, ceiling mounting and wall mounting +Working temperature is -50°C to 70°C



Application

I+Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.



"Non-dim/dim" and "Mono/Tunable white/chromatic" is availble, Pls confirm before ordering.



ON/OFF 0-10V DALI




Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	ССТ (К)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-03A-60	φ225XH150mm	60 W	>80	3000-6000K	7650 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	2.00 kgs
HB-03A-100	φ225XH150mm	100 W	>80	3000-6000K	12820 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	2.10 kgs
	k, and customize		1	1	1	1	1	1	1	1

2. It has five different sizes from 60-400W.

Installation Method





Photos



LED HIGH BAY



▼ Charaterastic

Power Up Any Space


1.Durable & Efficient: Built-to-last design & LEDs deliver long life (50,000 hrs) & high output (up to 130~180 lm/W).

2. Sharp Focus, Happy Eyes: Precise optics provide bright, comfortable light with glare control.

3. Future-Proof Smart Control: Integrates with Interact software for adaptable lighting management.

4. Versatile Applications: Ideal for warehouses, factories, stores, restaurants, sports centers, and more.

+Loop, ceiling mounting and wall mounting +Working temperature is -50°C to 70°C



Application

I+Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.



"Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI




Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	ССТ (К)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W	
HB-03B-150	φ265XH150mm	150 W	>80	3000-6000K	19320 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	2.70 kgs	
Indextension Provide Provide<											

Installation Method





LED HIGH BAY



▼ Charaterastic

Power Up Any Space


1.Durable & Efficient: Built-to-last design & LEDs deliver long life (50,000 hrs) & high output (up to 130~180 lm/W).

2. Sharp Focus, Happy Eyes: Precise optics provide bright, comfortable light with glare control.

3. Future-Proof Smart Control: Integrates with Interact software for adaptable lighting management.

4. Versatile Applications: Ideal for warehouses, factories, stores, restaurants, sports centers, and more.

+Loop, ceiling mounting and wall mounting +Working temperature is -50°C to 70°C



Application

I+Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.



"Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI




Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	ССТ (К)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W	
HB-03C-200	φ300XH150mm	200 W	>80	3000-6000K	25820 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	3.20 kgs	
I+Notes: 1. Finish: Black, and customized RAL available 2. It has five different sizes from 60-400W.											


Installation Method





LED HIGH BAY





Charaterastic

Power Up Any Space

1.Durable & Efficient: Built-to-last design & LEDs deliver long life (50,000 hrs) & high output (up to 130~180 lm/W).

2. Sharp Focus, Happy Eyes: Precise optics provide bright, comfortable light with glare control.

3. Future-Proof Smart Control: Integrates with Interact software for adaptable lighting management.

4. Versatile Applications: Ideal for warehouses, factories, stores, restaurants, sports centers, and more.

+Loop, ceiling mounting and wall mounting +Working temperature is -50°C to 70°C

▼ Application

I+Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

 "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



```
ON/OFF 0-10V DALI
```




Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	ССТ (К)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W		
HB-03D-300	φ460XH140mm	300 W	>80	3000-6000K	45000 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	4.50 kgs		
I + Notes: 1. Finish: Black, and customized RAL available 2. It has five different sizes from 60-400W.												

Installation Method





LED HIGH BAY



▼ Charaterastic

Power Up Any Space


1.Durable & Efficient: Built-to-last design & LEDs deliver long life (50,000 hrs) & high output (up to 130~180 lm/W).

2. Sharp Focus, Happy Eyes: Precise optics provide bright, comfortable light with glare control.

3. Future-Proof Smart Control: Integrates with Interact software for adaptable lighting management.

4. Versatile Applications: Ideal for warehouses, factories, stores, restaurants, sports centers, and more.

+Loop, ceiling mounting and wall mounting +Working temperature is -50°C to 70°C



Application

I+Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.



"Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI



Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	ССТ (К)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W		
HB-03E-400	φ490XH140mm	400 W	>80	3000-6000K	60000 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	4.90 kgs		
Indication Inditest in iteration Indication In												

Installation Method



