



▼ Charaterastic


Highbay Rectangular: Illuminate Any Industrial Space

1. Built to Last: Durable aluminum housing with efficient heat dissipation ensures long life (50,000 hours) and high output (up to 150 lm/W).
2. Sharp Focus, Happy Workers: Advanced optics deliver precise light distribution with glare control (UGR) for improved comfort.
3. Future-Proof Smart Control: Integrates with Interact, a scalable IoT software, for adaptable lighting management.
4. Versatile Applications: Ideal for warehouses, factories, exhibition halls, and more.

- ✦ Loop, ceiling mounting and wall mounting
- ✦ Working temperature is -50°C to 70°C

▼ Application

I+Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

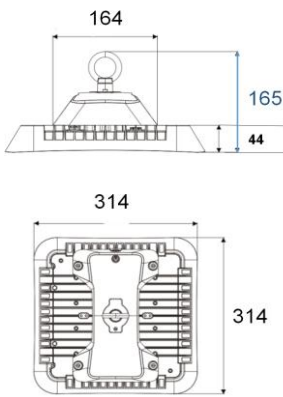

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI




▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-04B-150	L314xW314xH165 mm	150 W	>80	3000-6000K	22500 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	3.00 kgs
HB-04B-200	L314xW314xH165 mm	200 W	>80	3000-6000K	30000 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	3.50 kgs

I+Notes:

1. Finish: Black, and customized RAL available
2. It has two different sizes from 100-200W.

▼ Installation Method

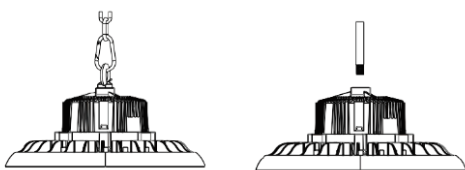

▼ Photos

