



▼ Charaterastic

Highbay Rectangular: Illuminate Any Industrial Space

1. Built to Last: Durable aluminum housing with efficient heat dissipation ensures long life (50,000 hours) and high output (up to 150 lm/W).
2. Sharp Focus, Happy Workers: Advanced optics deliver precise light distribution with glare control (UGR) for improved comfort.
3. Future-Proof Smart Control: Integrates with Interact, a scalable IoT software, for adaptable lighting management.
4. Versatile Applications: Ideal for warehouses, factories, exhibition halls, and more.

- + Loop, ceiling mounting and wall mounting
- + Working temperature is -50°C to 70°C



IP65

▼ Application

I+Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.


▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI




▼ Family Matrix (Two difference size)

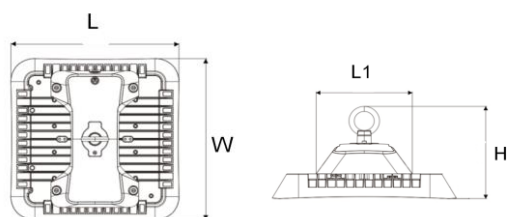


L (mm)	W (mm)	H (mm)	L1	Watt
263	263	167	215	100W
314	314	166	164	150/200W

▼ Installation Method

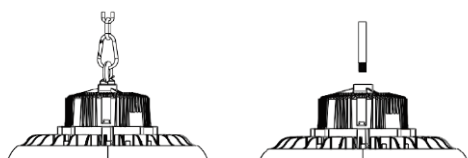

▼ Photos



▼ Technical Data (full sery)


Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-04A-100	L263XW263xH167 mm	100 W	>80	3000-6000K	15000 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	2.55 kgs
HB-04B-150	L314XW314xH165 mm	150 W	>80	3000-6000K	22500 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	3.00 kgs
HB-04B-200	L314XW314xH165 mm	200 W	>80	3000-6000K	30000 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	3.50 kgs

I+Notes:

1. Finish: Black, and customized RAL available
2. It has two different sizes from 100-200W.

▼ Naming scheme



HB-04A-100

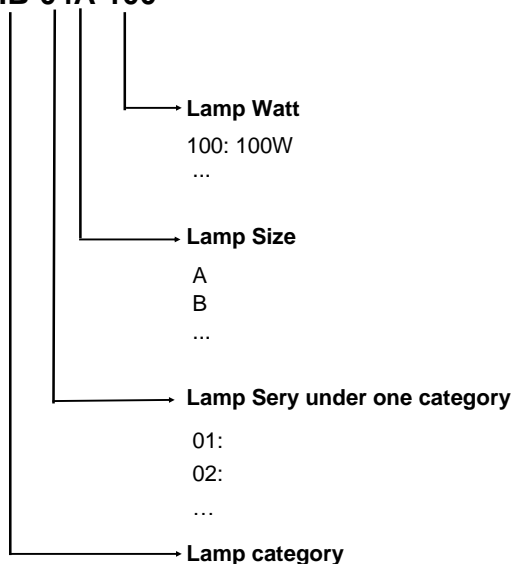

- SL: Sports Light
- HB: Highbay
- RL: Road Light
- WW: Wall Washer
- LL: Linear Light
- Neon: LED strip light



IP65



▼ Charaterastic

Highbay Rectangular: Illuminate Any Industrial Space

1. Built to Last: Durable aluminum housing with efficient heat dissipation ensures long life (50,000 hours) and high output (up to 150 lm/W).
2. Sharp Focus, Happy Workers: Advanced optics deliver precise light distribution with glare control (UGR) for improved comfort.
3. Future-Proof Smart Control: Integrates with Interact, a scalable IoT software, for adaptable lighting management.
4. Versatile Applications: Ideal for warehouses, factories, exhibition halls, and more.

- + Loop, ceiling mounting and wall mounting
- + Working temperature is -50°C to 70°C

▼ Application

I+ Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI



Microwave Sensor


▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-04A-100	L263XW263xH167 mm	100 W	>80	3000-6000K	15000 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	2.55 kgs


I+ Notes:

1. Finish: Black, and customized RAL available
2. It has two different sizes from 100-200W.

▼ Installation Method

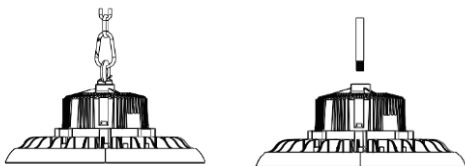

▼ Photos





▼ Charaterastic


Highbay Rectangular: Illuminate Any Industrial Space

1. Built to Last: Durable aluminum housing with efficient heat dissipation ensures long life (50,000 hours) and high output (up to 150 lm/W).
2. Sharp Focus, Happy Workers: Advanced optics deliver precise light distribution with glare control (UGR) for improved comfort.
3. Future-Proof Smart Control: Integrates with Interact, a scalable IoT software, for adaptable lighting management.
4. Versatile Applications: Ideal for warehouses, factories, exhibition halls, and more.

- + Loop, ceiling mounting and wall mounting
- + Working temperature is -50°C to 70°C

▼ Application

I+ Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

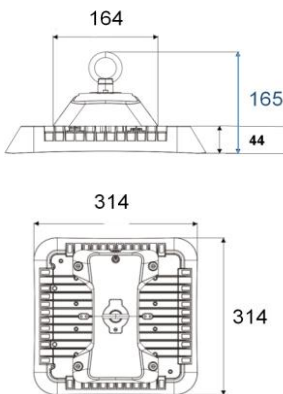

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI



Microwave Sensor


▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-04B-150	L314xW314xH165 mm	150 W	>80	3000-6000K	22500 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	3.00 kgs
HB-04B-200	L314xW314xH165 mm	200 W	>80	3000-6000K	30000 LM	100-277V AC	On/Off or Dim	60/90/120°	> 95	3.50 kgs

I+Notes:

1. Finish: Black, and customized RAL available
2. It has two different sizes from 100-200W.

▼ Installation Method

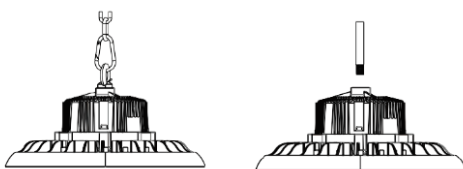

▼ Photos

