

IP65

▼ Charaterastic

Durable LED Light with Improved Efficiency

1. Built to Last: Aluminum body with anti-glare design for comfortable lighting.
2. Efficient Heat Dissipation: Dual-cavity heat dissipation ensures long lifespan.
3. Sharp Light Distribution: Precise optics provide accurate illumination (combines 5).
4. Versatile Applications: Suitable for warehouses, factories, and more (combines 6).

- ✦ Loop, ceiling mounting and wall mounting
- ✦ Working temperature is -50°C to 70°C

▼ Application

✦ Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI



Microwave Sensor


▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-05B-150	φ320XH158mm	150 W	>80	3000-6000K	22500 LM	100-277V AC	On/Off or Dim	90/120°	> 95	3.00 kgs

✦ Notes:

1. Finish: Black, and customized RAL available
2. It has three different sizes from 100-200W.

▼ Installation Method

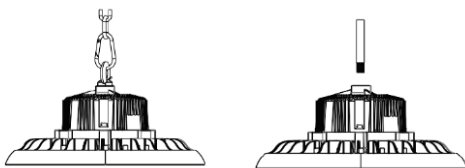

▼ Photos

