



## ▼ Charaterastic

### Brighten Any Space Efficiently

1. Durable & Efficient: Built-to-last aluminum housing with efficient heat dissipation ensures long life and high output efficacy(150lm/w).
2. Sharp Light Distribution: Advanced optics provide accurate light distribution for improved visibility.
3. Versatility & Savings: Ideal for warehouses, factories, and more. Replaces up to a 480W HID and is dimmable.

- + Loop, ceiling mounting and wall mounting
- + Working temperature is -50°C to 70°C



**IP54**

## ▼ Application

I+ Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF


0-10V

DALI




Microwave Sensor

## ▼ Family Matrix (Five difference size)



D (mm)	H (mm)	Watt
φ 350	287	60W
φ 350	307	100W
φ 350	337	120/150W
φ 350	387	200W
φ 350	437	240W

## ▼ Installation Method



## ▼ Photos



## ▼ Technical Data (full sery)


Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-07A-60	φ350XH287mm	60 W	>70	3000-6000K	7200 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	2.40 kgs
HB-07B-100	φ350XH307mm	100 W	>70	3000-6000K	12000 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	3.40 kgs
HB-07C-120	φ350XH337mm	120 W	>70	3000-6000K	14400 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	4.00 kgs
HB-07C-150	φ350XH337mm	150 W	>70	3000-6000K	18000 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	4.00 kgs
HB-07D-200	φ350XH387mm	200 W	>70	3000-6000K	24000 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	5.50 kgs
HB-07E-240	φ350XH437mm	240 W	>70	3000-6000K	28800 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	6.20 kgs

### I+ Notes:


1. Finish: Black, and customized RAL available
2. It has five different sizes from 60-240W.

## ▼ Naming scheme

### HB-07A-60

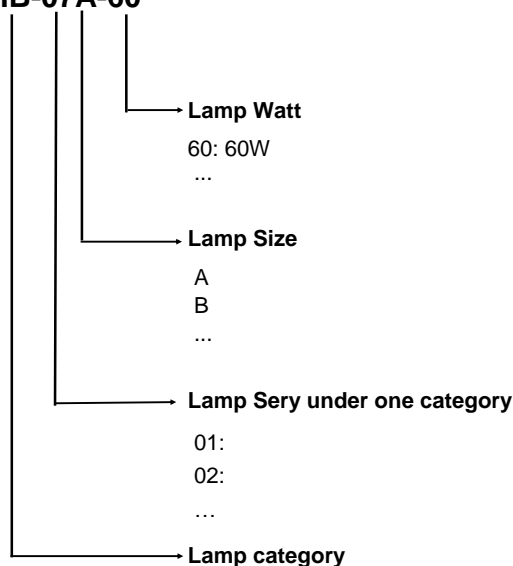

- SL: Sports Light
- HB: Highbay
- RL: Road Light
- WW: Wall Washer
- LL: Linear Light
- Neon: LED strip light



## ▼ Charaterastic

### Brighten Any Space Efficiently

1. Durable & Efficient: Built-to-last aluminum housing with efficient heat dissipation ensures long life and high output efficacy(150lm/w).
2. Sharp Light Distribution: Advanced optics provide accurate light distribution for improved visibility.
3. Versatility & Savings: Ideal for warehouses, factories, and more. Replaces up to a 480W HID and is dimmable.

- ✦ Loop, ceiling mounting and wall mounting
- ✦ Working temperature is -50°C to 70°C

## ▼ Application

✦ Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI



Microwave Sensor


## ▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-07A-60	φ350XH287mm	60 W	>70	3000-6000K	7200 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	2.40 kgs

I+Notes:


1. Finish: Black, and customized RAL available
2. It has five different sizes from 60-240W.

## ▼ Installation Method

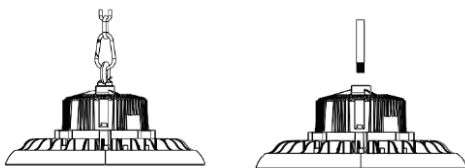

## ▼ Photos





## ▼ Charaterastic

### Brighten Any Space Efficiently

1. Durable & Efficient: Built-to-last aluminum housing with efficient heat dissipation ensures long life and high output efficacy(150lm/w).
2. Sharp Light Distribution: Advanced optics provide accurate light distribution for improved visibility.
3. Versatility & Savings: Ideal for warehouses, factories, and more. Replaces up to a 480W HID and is dimmable.

- ✦ Loop, ceiling mounting and wall mounting
- ✦ Working temperature is -50°C to 70°C

## ▼ Application

✦ Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI



Microwave Sensor


## ▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-07B-100	φ350XH307mm	100 W	>70	3000-6000K	12000 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	3.40 kgs

### ✦ Notes:


1. Finish: Black, and customized RAL available
2. It has five different sizes from 60-240W.

## ▼ Installation Method

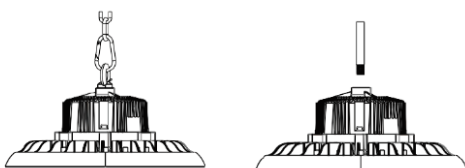

## ▼ Photos





## ▼ Charaterastic

### Brighten Any Space Efficiently

1. Durable & Efficient: Built-to-last aluminum housing with efficient heat dissipation ensures long life and high output efficacy(150lm/w).
2. Sharp Light Distribution: Advanced optics provide accurate light distribution for improved visibility.
3. Versatility & Savings: Ideal for warehouses, factories, and more. Replaces up to a 480W HID and is dimmable.

- ✦ Loop, ceiling mounting and wall mounting
- ✦ Working temperature is -50°C to 70°C

## ▼ Application

✦ Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI



Microwave Sensor


## ▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-07C-120	φ350XH337mm	120 W	>70	3000-6000K	14400 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	4.00 kgs
HB-07C-150	φ350XH337mm	150 W	>70	3000-6000K	18000 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	4.00 kgs

✦ Notes:


1. Finish: Black, and customized RAL available
2. It has five different sizes from 60-240W.

## ▼ Installation Method

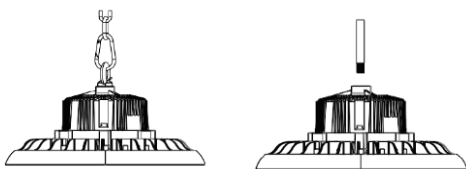

## ▼ Photos





## ▼ Charaterastic

### Brighten Any Space Efficiently

1. Durable & Efficient: Built-to-last aluminum housing with efficient heat dissipation ensures long life and high output efficacy(150lm/w).
  2. Sharp Light Distribution: Advanced optics provide accurate light distribution for improved visibility.
  3. Versatility & Savings: Ideal for warehouses, factories, and more. Replaces up to a 480W HID and is dimmable.
- ✦ Loop, ceiling mounting and wall mounting
  - ✦ Working temperature is -50°C to 70°C

## ▼ Application

✦ Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI



Microwave Sensor


## ▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-07D-200	φ350XH387mm	200 W	>70	3000-6000K	24000 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	5.50 kgs

### ✦ Notes:


1. Finish: Black, and customized RAL available
2. It has five different sizes from 60-240W.

## ▼ Installation Method

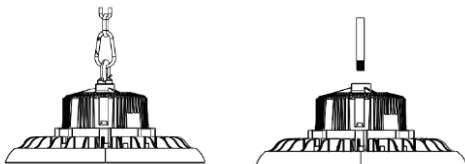

## ▼ Photos





## ▼ Charaterastic

### Brighten Any Space Efficiently

1. Durable & Efficient: Built-to-last aluminum housing with efficient heat dissipation ensures long life and high output efficacy(150lm/w).
  2. Sharp Light Distribution: Advanced optics provide accurate light distribution for improved visibility.
  3. Versatility & Savings: Ideal for warehouses, factories, and more. Replaces up to a 480W HID and is dimmable.
- ✦ Loop, ceiling mounting and wall mounting
  - ✦ Working temperature is -50°C to 70°C

## ▼ Application

✦ Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI



Microwave Sensor


## ▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-07E-240	φ350XH437mm	240 W	>70	3000-6000K	28800 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	6.20 kgs

### ✦ Notes:

1. Finish: Black, and customized RAL available
2. It has five different sizes from 60-240W.

## ▼ Installation Method

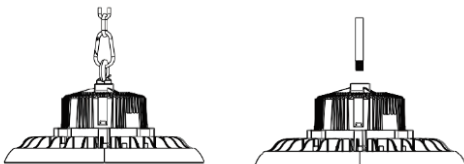

## ▼ Photos

