


▼ Charaterastic



Brighten Any Space Efficiently

1. Durable & Efficient: Built-to-last aluminum housing with efficient heat dissipation ensures long life and high output efficacy(150lm/w).
2. Sharp Light Distribution: Advanced optics provide accurate light distribution for improved visibility.
3. Versatility & Savings: Ideal for warehouses, factories, and more. Replaces up to a 480W HID and is dimmable.

- + Loop, ceiling mounting and wall mounting
- + Working temperature is -50°C to 70°C



▼ Application

I+ Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.



▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI



Microwave Sensor


▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-07C-120	φ350XH337mm	120 W	>70	3000-6000K	14400 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	4.00 kgs
HB-07C-150	φ350XH337mm	150 W	>70	3000-6000K	18000 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	4.00 kgs

I+ Notes:

1. Finish: Black, and customized RAL available
2. It has five different sizes from 60-240W.

▼ Installation Method

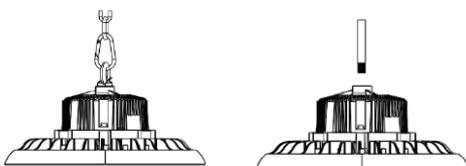

▼ Photos

