

## ▼ Charaterastic

### Brighten Any Space Efficiently

1. Durable & Efficient: Built-to-last aluminum housing with efficient heat dissipation ensures long life and high output efficacy(150lm/w).
  2. Sharp Light Distribution: Advanced optics provide accurate light distribution for improved visibility.
  3. Versatility & Savings: Ideal for warehouses, factories, and more. Replaces up to a 480W HID and is dimmable.
- ✦ Loop, ceiling mounting and wall mounting
  - ✦ Working temperature is -50°C to 70°C

## ▼ Application

✦ Warehouses, factories, exhibition halls, airports, gymnasiums, subway stations, outdoor advertising, etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI



Microwave Sensor


## ▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
HB-07D-200	φ350XH387mm	200 W	>70	3000-6000K	24000 LM	100-277V AC	On/Off or Dim	45/90/120°	> 95	5.50 kgs

### ✦ Notes:

1. Finish: Black, and customized RAL available
2. It has five different sizes from 60-240W.

## ▼ Installation Method

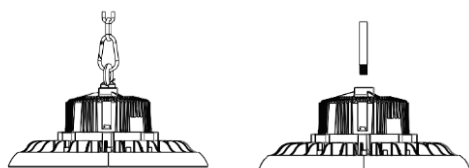

## ▼ Photos

