





### ▼ Charaterastic



Neon Flex Top Bend: Effortless Brilliance

- 1. Easy, Flexible Installation:**  
Installs whole for simple setup (no extra parts needed).  
Cuts to size for customized applications.  
Maintains IP67 weatherproof rating even when cut (with proper accessories).
- 2. Durable and Long-Lasting:**  
Made with UV-resistant polyurethane for lasting color and aesthetics.  
Withstands harsh environments (thanks to the IP67 rating).
- 3. Flawless Linear Lighting:**  
Delivers consistent, uniform light output along the entire length. (You can remove "all long" as it's redundant with "entire length")



### ▼ Application

I+Infrastructure: Airport ,Railway Station ,Bridge , Municipal building ,Tunnel

I+Urban: Administrative Building , Commercial Building , Hotel , Mall

I+Cultural and Entertainment: Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.




ON/OFF 0-10V DALI DMX TRIAC

### ▼ Technical Data

Model	SIZE (mm)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	VOLT	Control	CUTTING (mm)	Remark
NEON-01B	12*12mm	Top Bending (Φ > 80-120mm)	6/8/10	>80	Mono 2700-6000K	420~700	DC24V	ON/OFF	36	standard 3pc clips/M
NEON-01B	12*12mm	Top Bending (Φ > 80-120mm)	6/8/10	>80	Tunable white 2700-6000K	420~700	DC24V	DMX	36	standard 3pc clips/M
NEON-01B	12*12mm	Top Bending (Φ > 80-120mm)	6/8/10	/	chromatic (RGB or RGBW)	200~300	DC24V	DMX	36	standard 3pc clips/M

### ▼ Installation Method

1. Surface Mounted
2. Recessed Mounted

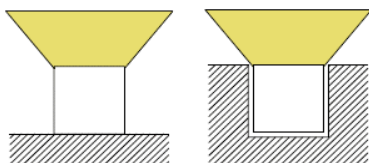

### ▼ Outlet Method

