



IP66

▼ Charaterastic

1. Durable Design: Aluminum housing and T2S lens ensure long-lasting performance.
2. All-Weather Power: Charges in 4-5 hours, lasts 2 days even in cloudy weather.
3. Smart Controls: Remote and light control with battery indicator for easy operation.
4. Versatile Lighting: Adjustable color temperature (3000K-6500K) and high CRI (80) for various needs. (Combines CCT, CRI, and potentially working temperature)
5. Effortless Upkeep: Tool-free access and adjustable tilt simplify maintenance.

▼ Application

↑ Outdoor Occasion such as Urban main road, secondary road, branch road, industrial park road lighting, etc


▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI

▼ Family Matrix (Three different size)



L (mm)	W (mm)	T (mm) =thickness	Watt
467	160	73	50/60W
528	180	83	100/120W
600	200	83	150W

▼ Project



▼ Photos





▼ Technical Data (full sery)

Model	SIZE (mm)	POWER	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
RL-04A-50	467*160*73mm	50W	>80	3000-6500K	110-120	AC85-320V	ON/OFF	110°	>0.95	
RL-04A-60	467*160*73mm	60W	>80	3000-6500K	110-120	AC85-320V	ON/OFF	110°	>0.95	
RL-04B-100	528*180*83mm	100W	>80	3000-6500K	110-120	AC85-320V	ON/OFF	110°	>0.95	
RL-04B-120	528*180*83mm	120W	>80	3000-6500K	110-120	AC85-320V	ON/OFF	110°	>0.95	
RL-04C-150	600*200*83mm	150W	>80	3000-6500K	110-120	AC85-320V	ON/OFF	110°	>0.95	

I+ Notes:


1. Finish: Black, and customized RAL available
2. It has three different sizes from 50W-150W.

▼ Photometric curve

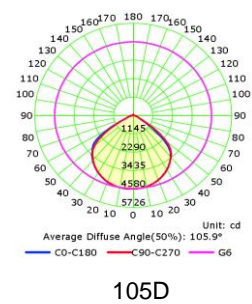

▼ Naming scheme


RL-04A-50

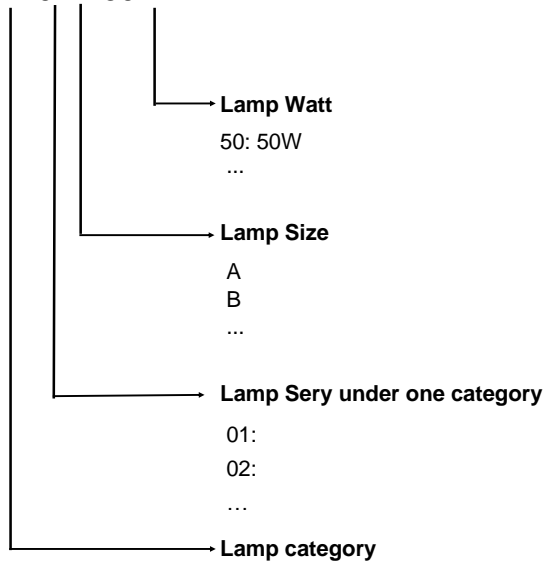

SL: Sports Light
HB: Highbay
RL: Road Light
WW: Wall Washer
LL: Linear Light
Neon: LED strip light



IP66

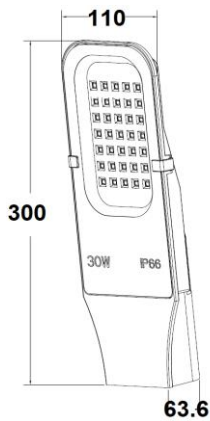

▼ Charaterastic

1. Durable Design: Aluminum housing and T2S lens ensure long-lasting performance.
2. All-Weather Power: Charges in 4-5 hours, lasts 2 days even in cloudy weather.
3. Smart Controls: Remote and light control with battery indicator for easy operation.
4. Versatile Lighting: Adjustable color temperature (3000K-6500K) and high CRI (80) for various needs. (Combines CCT, CRI, and potentially working temperature)
5. Effortless Upkeep: Tool-free access and adjustable tilt simplify maintenance.

▼ Application

Outdoor Occasion such as Urban main road, secondary road, branch road, industrial park road lighting, etc

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI

▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
RL-04A-50	467*160*73mm	50W	>80	3000-6500K	110-120	AC85-320V	ON/OFF	110°	>0.95	
RL-04A-60	467*160*73mm	60W	>80	3000-6500K	110-120	AC85-320V	ON/OFF	110°	>0.95	

I+Notes:

1. Finish: Black, and customized RAL available
2. It has three different sizes from 50W-150W.


▼ Project




▼ Photos



▼ Photometric curve




108D



105D



IP66

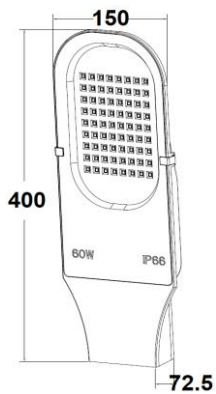

▼ Charaterastic

1. Durable Design: Aluminum housing and T2S lens ensure long-lasting performance.
2. All-Weather Power: Charges in 4-5 hours, lasts 2 days even in cloudy weather.
3. Smart Controls: Remote and light control with battery indicator for easy operation.
4. Versatile Lighting: Adjustable color temperature (3000K-6500K) and high CRI (80) for various needs. (Combines CCT, CRI, and potentially working temperature)
5. Effortless Upkeep: Tool-free access and adjustable tilt simplify maintenance.

▼ Application

I+ Outdoor Occasion such as Urban main road, secondary road, branch road, industrial park road lighting, etc

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI

▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
RL-04B-100	528*180*83mm	100W	>80	3000-6500K	110-120	AC85-320V	ON/OFF	110°	>0.95	
RL-04B-120	528*180*83mm	120W	>80	3000-6500K	110-120	AC85-320V	ON/OFF	110°	>0.95	

I+ Notes:

1. Finish: Black, and customized RAL available
2. It has three different sizes from 50W-150W.


▼ Project




▼ Photos



▼ Photometric curve



108D



105D



IP66

▼ Charaterastic

1. Durable Design: Aluminum housing and T2S lens ensure long-lasting performance.
2. All-Weather Power: Charges in 4-5 hours, lasts 2 days even in cloudy weather.
3. Smart Controls: Remote and light control with battery indicator for easy operation.
4. Versatile Lighting: Adjustable color temperature (3000K-6500K) and high CRI (80) for various needs. (Combines CCT, CRI, and potentially working temperature)
5. Effortless Upkeep: Tool-free access and adjustable tilt simplify maintenance.

▼ Application

I+ Outdoor Occasion such as Urban main road, secondary road, branch road, industrial park road lighting, etc

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI

▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
RL-04C-150	600*200*83mm	150W	>80	3000-6500K	110-120	AC85-320V	ON/OFF	110°	>0.95	

I+ Notes:

1. Finish: Black, and customized RAL available
2. It has three different sizes from 50W-150W.


▼ Project




▼ Photos



▼ Photometric curve



108D



105D