
### LED SPORT LIGHT



300W

1000W


600W

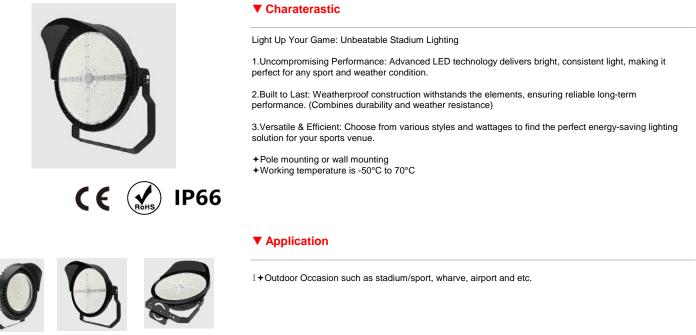



ON/OFF 0-10V DALI

#### ▼ Family Matrix (Six basic combinations )

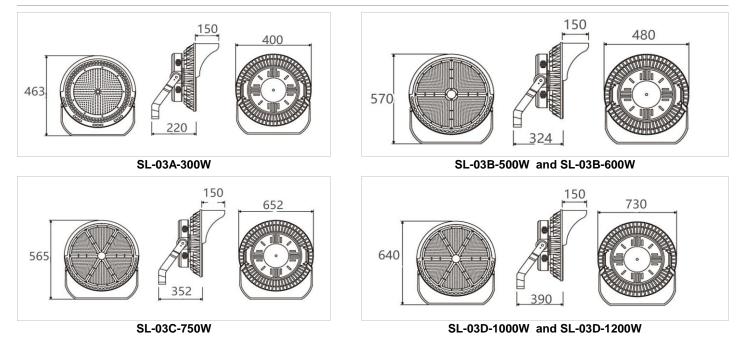

### LED SPORT LIGHT

#### **V** Simulation

▼ Project






#### ▼ Technical Data (full sery)

SIZE (mm)	POWER (W/M)	CRI	ССТ (К)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
463X400X220mm	300 W	>70	3000-5700K	45000 LM	AC90-305V	On/Off or Dim	60/90°	>0.95	9.80 kgs
570X480X324mm	500 W	>70	3000-5700K	75000 LM	AC90-305V	On/Off or Dim	15/30/60°	>0.95	14.80 kgs
570X480X324mm	600 W	>70	3000-5700K	90000 LM	AC90-305V	On/Off or Dim	15/30/60°	>0.95	16.00 kgs
565X652X352mm	750 W	>70	3000-5700K	112500 LM	AC90-305V	On/Off or Dim	15/30°	>0.95	20.00 kgs
640X730X390mm	1000 W	>70	3000-5700K	150000 LM	AC90-305V	On/Off or Dim	15/30°	>0.95	28.00 kgs
640X730X390mm	1200 W	>70	3000-5700K	180000 LM	AC90-305V	On/Off or Dim	15/30°	>0.95	28.00 kgs
	(mm) 463X400X220mm 570X480X324mm 570X480X324mm 565X652X352mm 640X730X390mm	(mm)         (W/M)           463X400X220mm         300 W           570X480X324mm         500 W           570X480X324mm         600 W           565X652X352mm         750 W           640X730X390mm         1000 W	(mm)         (W/M)         CRI           463X400X220mm         300 W         >70           570X480X324mm         500 W         >70           570X480X324mm         600 W         >70           565X652X352mm         750 W         >70           640X730X390mm         1000 W         >70	(mm)         (W/M)         CRI         CCT (K)           463X400X220mm         300 W         >70         3000-5700K           570X480X324mm         500 W         >70         3000-5700K           570X480X324mm         600 W         >70         3000-5700K           565X652X352mm         750 W         >70         3000-5700K           640X730X390mm         1000 W         >70         3000-5700K	(mm)         (W/M)         CRI         CCT (K)         LUMINOUS           463X400X220mm         300 W         >70         3000-5700K         45000 LM           570X480X324mm         500 W         >70         3000-5700K         75000 LM           570X480X324mm         600 W         >70         3000-5700K         90000 LM           565X652X352mm         750 W         >70         3000-5700K         112500 LM           640X730X390mm         1000 W         >70         3000-5700K         150000 LM	(mm)         (W/M)         CRI         CCT (K)         LUMINOUS         VOLT           463X400X220mm         300 W         >70         3000-5700K         45000 LM         AC90-305V           570X480X324mm         500 W         >70         3000-5700K         75000 LM         AC90-305V           570X480X324mm         600 W         >70         3000-5700K         90000 LM         AC90-305V           565X652X352mm         750 W         >70         3000-5700K         112500 LM         AC90-305V           640X730X390mm         1000 W         >70         3000-5700K         150000 LM         AC90-305V	(mm)         (W/M)         CRI         CCT (K)         LUMINOUS         VOLT         Control           463X400X220mm         300 W         >70         3000-5700K         45000 LM         AC90-305V         On/Off or Dim           570X480X324mm         500 W         >70         3000-5700K         75000 LM         AC90-305V         On/Off or Dim           570X480X324mm         600 W         >70         3000-5700K         90000 LM         AC90-305V         On/Off or Dim           565X652X352mm         750 W         >70         3000-5700K         112500 LM         AC90-305V         On/Off or Dim           640X730X390mm         1000 W         >70         3000-5700K         150000 LM         AC90-305V         On/Off or Dim           640X730X390mm         1200 W         >70         3000-5700K         180000 LM         AC90-305V         On/Off or Dim	(mm)         (W/M)         CRI         CCT (K)         LUMINOUS         VOL1         Control         Beam Angle           463X400X220mm         300 W         >70         3000-5700K         45000 LM         AC90-305V         On/Off or Dim         60/90°           570X480X324mm         500 W         >70         3000-5700K         75000 LM         AC90-305V         On/Off or Dim         15/30/60°           570X480X324mm         600 W         >70         3000-5700K         90000 LM         AC90-305V         On/Off or Dim         15/30/60°           565X652X352mm         750 W         >70         3000-5700K         112500 LM         AC90-305V         On/Off or Dim         15/30°           640X730X390mm         1000 W         >70         3000-5700K         150000 LM         AC90-305V         On/Off or Dim         15/30°           640X730X390mm         1200 W         >70         3000-5700K         180000 LM         AC90-305V         On/Off or Dim         15/30°	(mm)         (W/M)         CRI         CCI (K)         LUMINOUS         VOLI         Control         Beam Angle         PF           463X400X220mm         300 W         >70         3000-5700K         45000 LM         AC90-305V         On/Off or Dim         60/90°         >0.95           570X480X324mm         500 W         >70         3000-5700K         75000 LM         AC90-305V         On/Off or Dim         15/30/60°         >0.95           570X480X324mm         600 W         >70         3000-5700K         90000 LM         AC90-305V         On/Off or Dim         15/30/60°         >0.95           565X652X352mm         750 W         >70         3000-5700K         112500 LM         AC90-305V         On/Off or Dim         15/30/60°         >0.95           640X730X390mm         1000 W         >70         3000-5700K         150000 LM         AC90-305V         On/Off or Dim         15/30°         >0.95           640X730X390mm         1000 W         >70         3000-5700K         150000 LM         AC90-305V         On/Off or Dim         15/30°         >0.95           640X730X390mm         1200 W         >70         3000-5700K         180000 LM         AC90-305V         On/Off or Dim         15/30°         >0.95

1. Finish: Black, and customized RAL available

2. It can be changed into 4 basic combinations from 300W-1200W.


#### Photometric curve

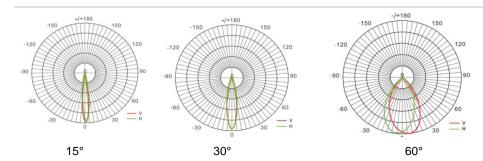

RIDILUX LIGHTING info@ridilux.com



#### ▼ Naming scheme

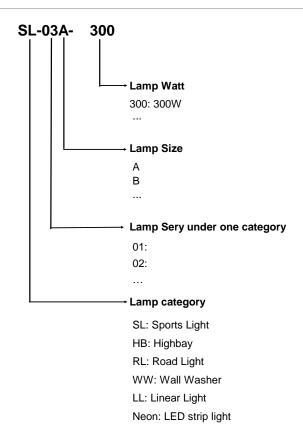

#### 

#### ▼ Charaterastic

Light Up Your Game: Unbeatable Stadium Lighting

1.Uncompromising Performance: Advanced LED technology delivers bright, consistent light, making it perfect for any sport and weather condition.

LED SPORT LIGHT


2.Built to Last: Weatherproof construction withstands the elements, ensuring reliable long-term performance. (Combines durability and weather resistance)

3.Versatile & Efficient: Choose from various styles and wattages to find the perfect energy-saving lighting solution for your sports venue.

+ Pole mounting or wall mounting
+ Working temperature is -50°C to 70°C

#### Application

 ${\rm I} \mbox{+} \mbox{Outdoor}$  Occasion such as stadium/sport, wharve, airport and etc.



#### "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



#### Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	ССТ (К)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-03A-300	463X400X220mm	300 W	>70	3000-5700K	45000 LM	AC90-305V	On/Off or Dim	60/90°	>0.95	9.80 kgs

I+Notes:

1. Finish: Black, and customized RAL available

2. It can be changed into 4 basic combinations from 300W-1200W.


#### Simulation

### ▼ Project





#### Photometric curve

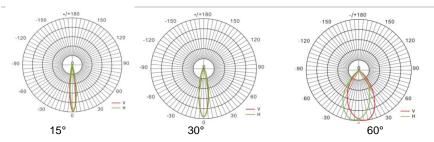

### LED SPORT LIGHT



#### ▼ Charaterastic

Light Up Your Game: Unbeatable Stadium Lighting

1. Uncompromising Performance: Advanced LED technology delivers bright, consistent light, making it perfect for any sport and weather condition.

2.Built to Last: Weatherproof construction withstands the elements, ensuring reliable long-term performance. (Combines durability and weather resistance)


3.Versatile & Efficient: Choose from various styles and wattages to find the perfect energy-saving lighting solution for your sports venue.

+Pole mounting or wall mounting

+Working temperature is -50°C to 70°C

#### Application

I+Outdoor Occasion such as stadium/sport, wharve, airport and etc.



#### "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



#### Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	ССТ (К)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-03B-500	570X480X324mm	500 W	>70	3000-5700K	75000 LM	AC90-305V	On/Off or Dim	15/30/60°	>0.95	14.80 kgs
SL-03B-600	570X480X324mm	600 W	>70	3000-5700K	90000 LM	AC90-305V	On/Off or Dim	15/30/60°	>0.95	16.00 kgs
+Notes:	1									

1. Finish: Black, and customized RAL available

2. It can be changed into 4 basic combinations from 300W-1200W.


#### Simulation


#### Project





#### Photometric curve





# RIDILUX $15^{\circ}$ $30^{\circ}$ $90^{\circ}$ 9

### LED SPORT LIGHT

## LED SPORT LIGHT



#### ▼ Charaterastic

Light Up Your Game: Unbeatable Stadium Lighting

1.Uncompromising Performance: Advanced LED technology delivers bright, consistent light, making it perfect for any sport and weather condition.

2.Built to Last: Weatherproof construction withstands the elements, ensuring reliable long-term performance. (Combines durability and weather resistance)


3.Versatile & Efficient: Choose from various styles and wattages to find the perfect energy-saving lighting solution for your sports venue.

+Pole mounting or wall mounting

+Working temperature is -50°C to 70°C

#### Application

I+Outdoor Occasion such as stadium/sport, wharve, airport and etc.



#### "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



#### Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	ССТ (К)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-03C-750	565X652X352mm	750 W	>70	3000-5700K	112500 LM	AC90-305V	On/Off or Dim	15/30°	>0.95	20.00 kgs
I+Notes:										

1. Finish: Black, and customized RAL available

It can be changed into 4 basic combinations from 300W-1200W.


#### Simulation

#### ▼ Project





#### Photometric curve

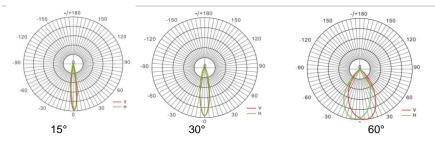

#### **IP66** CE

#### ▼ Charaterastic

Light Up Your Game: Unbeatable Stadium Lighting

1.Uncompromising Performance: Advanced LED technology delivers bright, consistent light, making it perfect for any sport and weather condition.


2.Built to Last: Weatherproof construction withstands the elements, ensuring reliable long-term performance. (Combines durability and weather resistance)

3. Versatile & Efficient: Choose from various styles and wattages to find the perfect energy-saving lighting solution for your sports venue.

+Pole mounting or wall mounting +Working temperature is -50°C to 70°C

#### Application

I+Outdoor Occasion such as stadium/sport, wharve, airport and etc.



"Non-dim/dim" and "Mono/Tunable white/chromatic" is availble, Pls confirm before ordering.



#### Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-03D-1000	640X730X390mm	1000 W	>70	3000-5700K	150000 LM	AC90-305V	On/Off or Dim	15/30°	>0.95	28.00 kgs
SL-03D-1200	640X730X390mm	1200 W	>70	3000-5700K	180000 LM	AC90-305V	On/Off or Dim	15/30°	>0.95	28.00 kgs

Finish: Black, and customized RAL available
 It can be changed into 4 basic combinations from 300W-1200W.

Simulation

#### ▼ Project






## LED SPORT LIGHT



### LED SPORT LIGHT

### ▼ Photometric curve

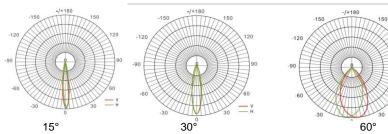

120