




IP66

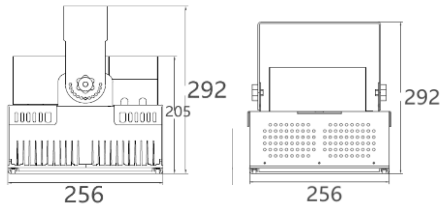

▼ Charaterastic

Built to Last & Shine Bright

- 1.Cool Operation: Airflow design prevents overheating and ensures long LED lifespan.
- 2.Rugged Construction: High-grade aluminum housing with a protective coating resists impact, dust, and moisture.
- 3.Advanced Heat Dissipation: Dual-chamber design isolates heat sources for optimal performance.
- 4.Reliable & Efficient: High-voltage protection and efficient LEDs deliver long life and brightness even with fluctuating power grids.

- + Pole mounting or wall mounting
- + Working temperature is -50°C to 70°C

▼ Application

I + Outdoor Occasion such as stadium/sport, wharve, airport and etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



Mono

ON/OFF 0-10V DALI

▼ Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-04B-150	256X256X292mm	150 W	>80	3000-5700K	26250 LM	AC90-305V	On/Off or Dim	120°	>0.95	6.80 kgs
SL-04B-200	256X256X292mm	200 W	>80	3000-5700K	35000 LM	AC90-305V	On/Off or Dim	120°	>0.95	7.20 kgs

I + Notes:

1. Finish: Black, and customized RAL available
2. It has two size with 4 different watt from 72W-200W, also can make different head combination.


▼ Simulation



▼ Project



▼ Photometric curve



120°