



▼ Charaterastic

Shine Smarter: The Future of Stadium Lighting

1. **Precise & Sustainable:** Minimizes light spill and glare, uses replaceable parts, and boasts plastic-free packaging for eco-friendly illumination.
2. **Smart & Future-Proof:** Integrates with smart cities, allows for upgrades, and features a modular design for easy maintenance.
3. **Durable & Adjustable:** Built to last with a weatherproof housing, and offers adjustable light levels for optimal use.

- + Pole mounting or wall mounting
- + Working temperature is -50°C to 70°C



IP66

▼ Application

I + Outdoor Occasion such as stadium/sport, wharve, airport and etc.


▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available,
Pls confirm before ordering.




Mono

ON/OFF


▼ Family Matrix (Six size with 6 different watt)

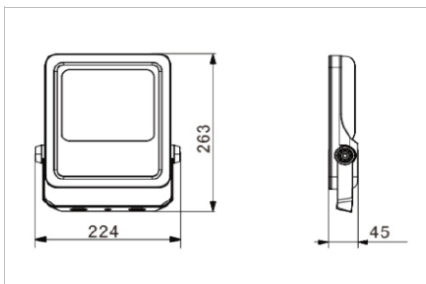


SL-05A-50W

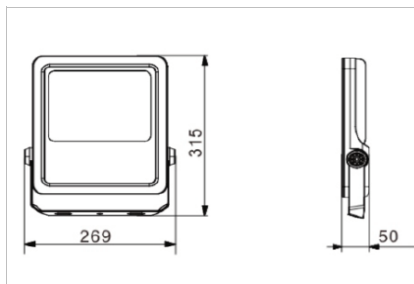


SL-05B-100W

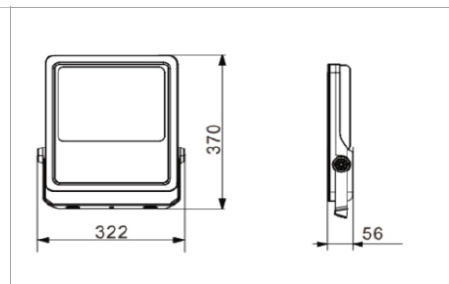


SL-05C-150W

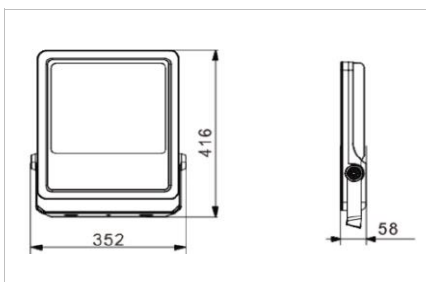

SL-05D-200

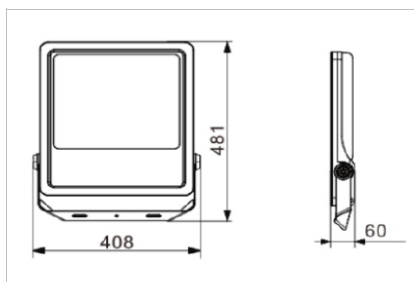

SL-05E-300W

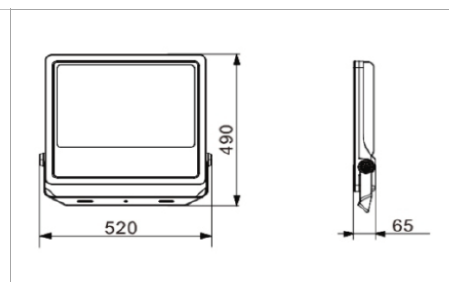

SL-05F-400W

▼ Simulation

▼ Project




▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-05A-50	263X224X45mm	50 W	>80	3000-6000K	6000 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	1.30 kgs
SL-05B-100	315X269X50mm	100 W	>80	3000-6000K	13000 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	2.10 kgs
SL-05C-150	370X322X56mm	150 W	>80	3000-6000K	19500 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	3.40 kgs
SL-05D-200	416X352X58mm	200 W	>80	3000-6000K	26000 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	4.60 kgs
SL-05E-300	481X408X60mm	300 W	>80	3000-6000K	39000 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	5.80 kgs
SL-05F-400	490X520X65mm	400 W	>80	3000-6000K	52000 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	8.30 kgs


I ↗ Notes:

1. Finish: Gray, and customized RAL available
2. It has six size with 6 different watt from 50W-400W.

▼ Photometric curve

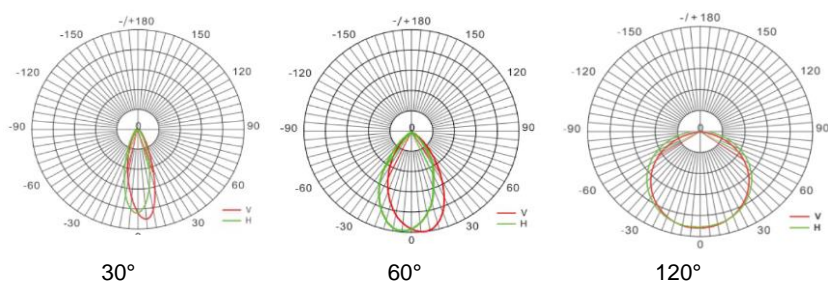

▼ Naming scheme

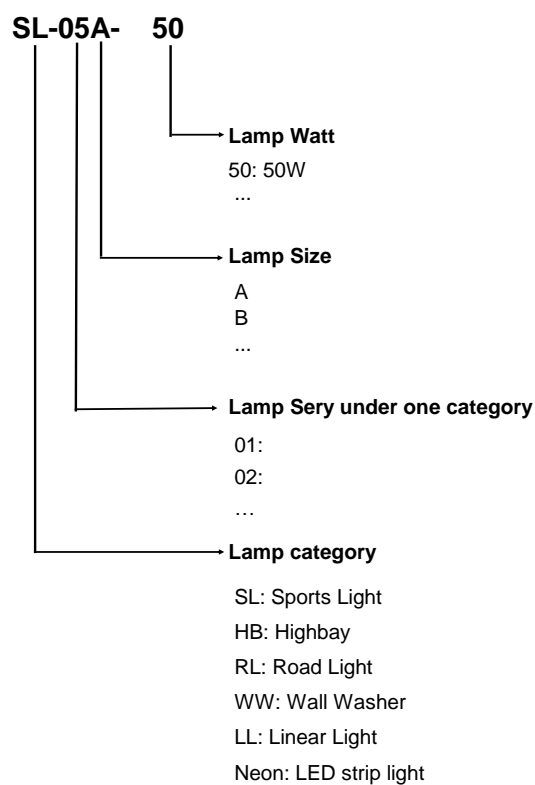



▼ Charaterastic

Shine Smarter: The Future of Stadium Lighting

1. Precise & Sustainable: Minimizes light spill and glare, uses replaceable parts, and boasts plastic-free packaging for eco-friendly illumination.
2. Smart & Future-Proof: Integrates with smart cities, allows for upgrades, and features a modular design for easy maintenance.
3. Durable & Adjustable: Built to last with a weatherproof housing, and offers adjustable light levels for optimal use.


- + Pole mounting or wall mounting
- + Working temperature is -50°C to 70°C

▼ Application

I + Outdoor Occasion such as stadium/sport, wharve, airport and etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.

Mono ON/OFF

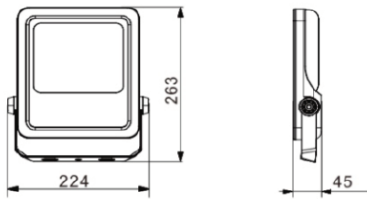

▼ Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-05A-50	263X224X45mm	50 W	>80	3000-6000K	6000 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	1.30 kgs


I + Notes:

1. Finish: Gray, and customized RAL available
2. It has six size with 6 different watt from 50W-400W.


▼ Simulation



▼ Project

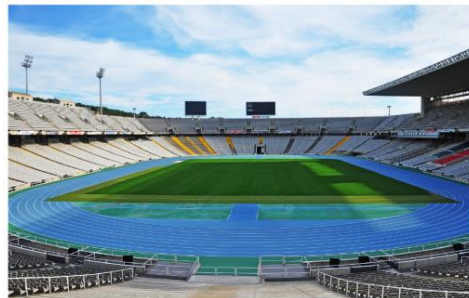

▼ Photometric curve

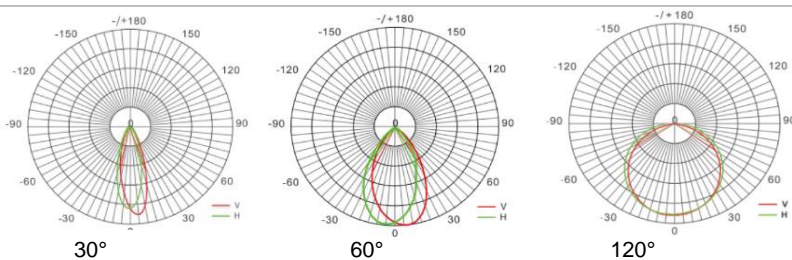



▼ Charaterastic

Shine Smarter: The Future of Stadium Lighting

1. Precise & Sustainable: Minimizes light spill and glare, uses replaceable parts, and boasts plastic-free packaging for eco-friendly illumination.

2. Smart & Future-Proof: Integrates with smart cities, allows for upgrades, and features a modular design for easy maintenance.

3. Durable & Adjustable: Built to last with a weatherproof housing, and offers adjustable light levels for optimal use.


- + Pole mounting or wall mounting
- + Working temperature is -50°C to 70°C

▼ Application

I + Outdoor Occasion such as stadium/sport, wharve, airport and etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.

Mono

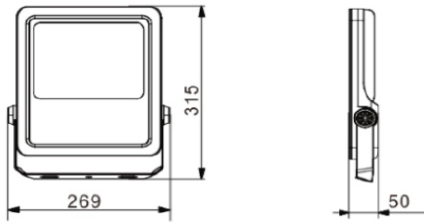

▼ Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-05B-100	315X269X50mm	100 W	>80	3000-6000K	13000 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	2.10 kgs

I + Notes:

1. Finish: Gray, and customized RAL available
2. It has six size with 6 different watt from 50W-400W.


▼ Simulation



▼ Project



▼ Photometric curve

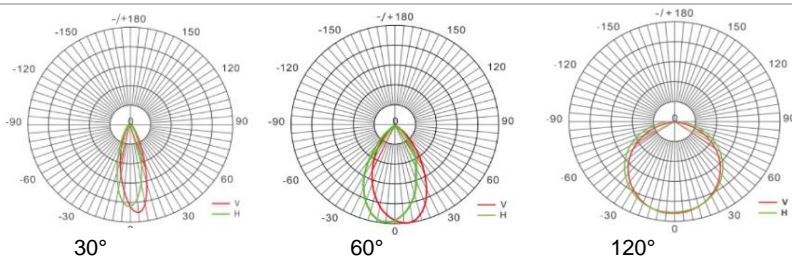



▼ Charaterastic

Shine Smarter: The Future of Stadium Lighting

1. Precise & Sustainable: Minimizes light spill and glare, uses replaceable parts, and boasts plastic-free packaging for eco-friendly illumination.
2. Smart & Future-Proof: Integrates with smart cities, allows for upgrades, and features a modular design for easy maintenance.
3. Durable & Adjustable: Built to last with a weatherproof housing, and offers adjustable light levels for optimal use.


- + Pole mounting or wall mounting
- + Working temperature is -50°C to 70°C

▼ Application

I + Outdoor Occasion such as stadium/sport, wharve, airport and etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.

Mono ON/OFF

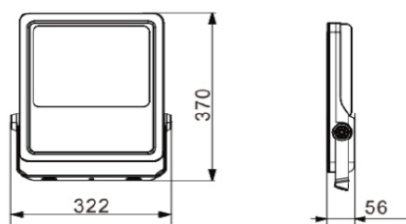

▼ Technical Data


Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-05C-150	370X322X56mm	150 W	>80	3000-6000K	19500 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	3.40 kgs

- I + Notes:
1. Finish: Gray, and customized RAL available
 2. It has six size with 6 different watt from 50W-400W.


▼ Simulation



▼ Project

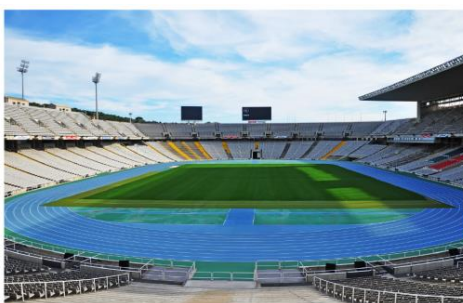

▼ Photometric curve

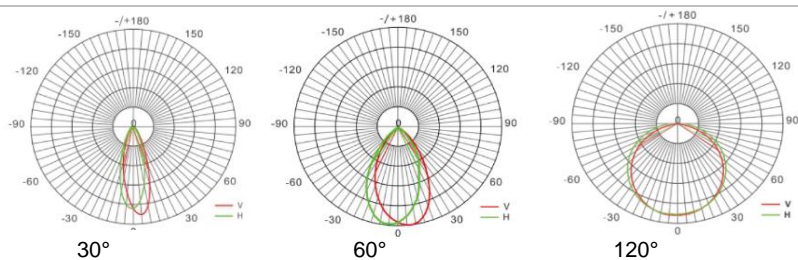



▼ Charaterastic

Shine Smarter: The Future of Stadium Lighting

- 1.Precise & Sustainable: Minimizes light spill and glare, uses replaceable parts, and boasts plastic-free packaging for eco-friendly illumination.
- 2.Smart & Future-Proof: Integrates with smart cities, allows for upgrades, and features a modular design for easy maintenance.
- 3.Durable & Adjustable: Built to last with a weatherproof housing, and offers adjustable light levels for optimal use.


- + Pole mounting or wall mounting
- + Working temperature is -50°C to 70°C

▼ Application

I + Outdoor Occasion such as stadium/sport, wharve, airport and etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.

Mono ON/OFF

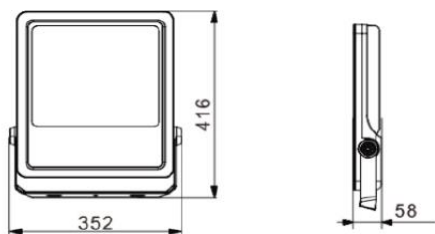

▼ Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-05D-200	416X352X58mm	200 W	>80	3000-6000K	26000 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	4.60 kgs

- I + Notes:
1. Finish: Gray, and customized RAL available
 2. It has six size with 6 different watt from 50W-400W.


▼ Simulation



▼ Project



▼ Photometric curve

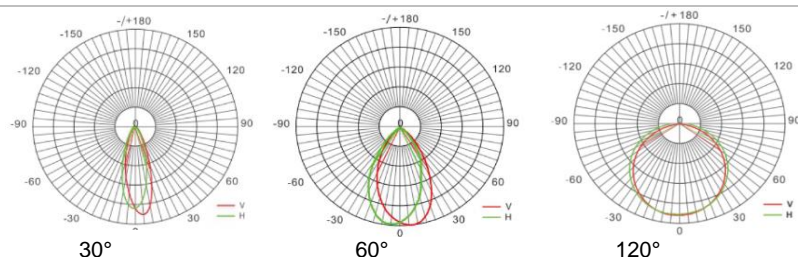



▼ Charaterastic

Shine Smarter: The Future of Stadium Lighting

1. Precise & Sustainable: Minimizes light spill and glare, uses replaceable parts, and boasts plastic-free packaging for eco-friendly illumination.
2. Smart & Future-Proof: Integrates with smart cities, allows for upgrades, and features a modular design for easy maintenance.
3. Durable & Adjustable: Built to last with a weatherproof housing, and offers adjustable light levels for optimal use.


- + Pole mounting or wall mounting
- + Working temperature is -50°C to 70°C

▼ Application

I + Outdoor Occasion such as stadium/sport, wharve, airport and etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.

Mono ON/OFF

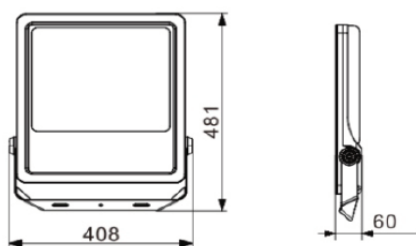

▼ Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-05E-300	481X408X60mm	300 W	>80	3000-6000K	39000 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	5.80 kgs

- I + Notes:
1. Finish: Gray, and customized RAL available
 2. It has six size with 6 different watt from 50W-400W.


▼ Simulation



▼ Project



▼ Photometric curve

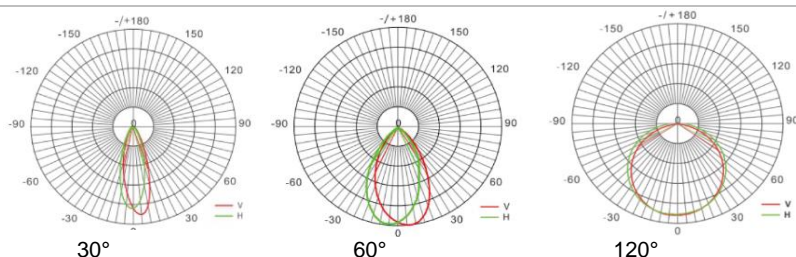



▼ Charaterastic

Shine Smarter: The Future of Stadium Lighting

1. Precise & Sustainable: Minimizes light spill and glare, uses replaceable parts, and boasts plastic-free packaging for eco-friendly illumination.
2. Smart & Future-Proof: Integrates with smart cities, allows for upgrades, and features a modular design for easy maintenance.
3. Durable & Adjustable: Built to last with a weatherproof housing, and offers adjustable light levels for optimal use.


- + Pole mounting or wall mounting
- + Working temperature is -50°C to 70°C

▼ Application

I + Outdoor Occasion such as stadium/sport, wharve, airport and etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.

Mono ON/OFF

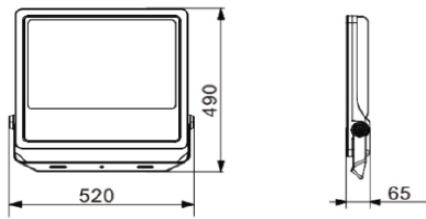

▼ Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS	VOLT	Control	Beam Angle	PF	N.W
SL-05F-400	490X520X65mm	400 W	>80	3000-6000K	52000 LM	AC100-265V	ON/OFF	30/60/90/120°	>0.95	8.30 kgs


I + Notes:

1. Finish: Gray, and customized RAL available
2. It has six size with 6 different watt from 50W-400W.

▼ Simulation



▼ Project

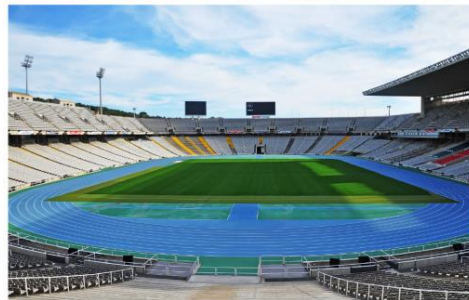

▼ Photometric curve

