




▼ 0410

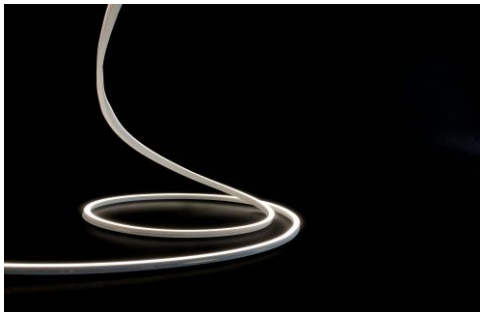

### ▼ Characteristic

Neon Flex Side Bend: Effortlessly Brilliant

1. Bend & Install Your Way: Whole or cut-to-size with no-fuss setup (maintains IP67 weatherproofing). Works even in extreme climates (-10° to +40°C).
2. Durable & Vibrant: Eco-friendly, UV-resistant construction ensures lasting brightness and beauty.
3. Flawless Linear Light: Delivers consistent illumination across the entire light surface.



### ▼ Application

I+Infrastructure: Airport ,Railway Station ,Bridge , Municipal building ,Tunnel

I+Urban: Administrative Building , Commercial Building , Hotel , Mall

I+Cultural and Entertainment: Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC




### ▼ Technical Data

Model	SIZE (mm)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	VOLT	Control	CUTTING (mm)	Remark
NEON-03A	4*10mm	Side Bending (Φ > 60-80mm)	6/8/10	>80	Mono 2700-6000K	400-650	DC24V	ON/OFF	36	standard 3pc clips/M

### ▼ Installation Method

1. Surface Mounted
2. Recessed Mounted

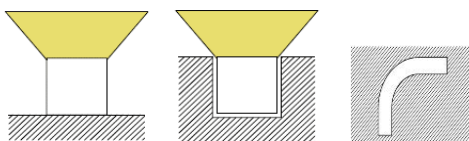

### ▼ Outlet Method

