


▼ 1616



▼ Characteristic

Neon Flex Side Bend: Effortlessly Brilliant

1. Bend & Install Your Way: Whole or cut-to-size with no-fuss setup (maintains IP67 weatherproofing). Works even in extreme climates (-10° to +40°C).
2. Durable & Vibrant: Eco-friendly, UV-resistant construction ensures lasting brightness and beauty.
3. Flawless Linear Light: Delivers consistent illumination across the entire light surface.

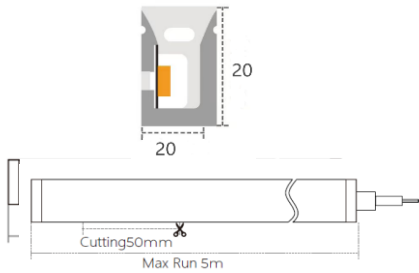

▼ Application

✦ **Infrastructure:** Airport, Railway Station, Bridge, Municipal building, Tunnel

✦ **Urban:** Administrative Building, Commercial Building, Hotel, Mall

✦ **Cultural and Entertainment:** Pavilion, Plaza, Village, Amusement park, Monuments, Cathedral, Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC


▼ Technical Data

Model	SIZE (mm)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	VOLT	Control	CUTTING (mm)	Remark
NEON-03F	12*20mm	Top Bending (Φ > 80-120mm)	10/12/15	>80	Mono 2700-6000K	700-950	DC24V	ON/OFF	50	standard 3pc clips/M
NEON-03F	12*20mm	Top Bending (Φ > 80-120mm)	10/12/15	>80	Tunable white 2700-6000K	700-950	DC24V	DMX	50	standard 3pc clips/M
NEON-03F	12*20mm	Top Bending (Φ > 80-120mm)	10/12/15	/	chromatic (RGB or RGBW)	300-450	DC24V	DMX	50	standard 3pc clips/M

Notes: Mono (2700K, 3000K, 3500K, 4000K, 4500K, 5000K, Red, Green, Blue, Amber), Tunable White (2700K-5000K), Chromatic (RGB, RGBW)

▼ Installation Method

1. Surface Mounted
2. Recessed Mounted

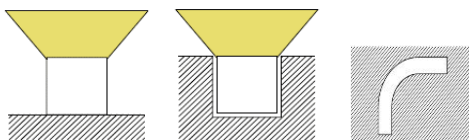

▼ Outlet Method

