



▼ Characteristic

Neon Flex Three Side Top Bend: Effortless Brilliance

1. Flexible & Easy Install: Installs whole or cuts to size for customization (maintains IP67 rating) - no extra parts needed.
2. Durable & Weatherproof (IP67): Eco-friendly, UV-resistant silicone construction ensures long-lasting vibrancy and withstands harsh environments.
3. Uniform Linear Illumination: Three-sided light emission delivers consistent brightness across the entire length.
4. High Light Transmittance: Up to brighter for exceptional illumination.


▼ Application

- ↳ **Infrastructure:** Airport ,Railway Station ,Bridge , Municipal building ,Tunnel
- ↳ **Urban:** Administrative Building , Commercial Building , Hotel , Mall
- ↳ **Cultural and Entertainment:** Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC

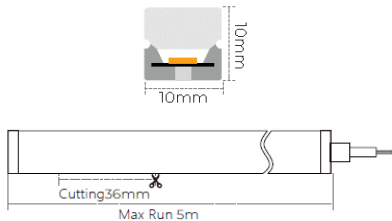


▼ Technical Data

| Model | SIZE (mm) | BENDING DIRECTION | POWER (W/M) | CRI | CCT (K) | LUMINOUS (LM/M) | VOLT | Control | CUTTING (mm) | Remark |
|----------|-----------|----------------------------|-------------|-----|--------------------------|-----------------|-------|---------|--------------|----------------------|
| NEON-02A | 10*10mm | Top Bending (Φ > 80-120mm) | 6/8/10 | >80 | Mono 2700-6000K | 420~700 | DC24V | ON/OFF | 36 | standard 3pc clips/M |
| NEON-02A | 10*10mm | Top Bending (Φ > 80-120mm) | 6/8/10 | >80 | Tunable white 2700-6000K | 420~700 | DC24V | DMX | 36 | standard 3pc clips/M |
| NEON-02A | 10*10mm | Top Bending (Φ > 80-120mm) | 6/8/10 | / | chromatic (RGB or RGBW) | 200~300 | DC24V | DMX | 36 | standard 3pc clips/M |

Notes: Mono (2700K,3000K,3500K,4000K,4500K,5000K, Red, Green, Blue, Amber), Tunable White (2700K~5000K), Chromatic (RGB, RGBW)

▼ Installation Method

1. Surface Mounted
2. Recessed Mounted

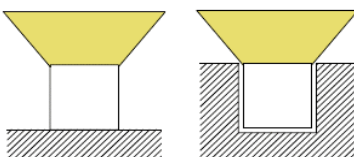

▼ Outlet Method

