

▼ 0615




▼ Characteristic

Neon Flex Dome Side Bend: Effortlessly Brilliant

1. Bend & Install Your Way: Whole or cut-to-size for a perfect fit (no extra parts, maintains IP67 weatherproofing). Works even in harsh weather (-10° to +40°C).

2. Durable & Vibrant: Eco-friendly materials and UV resistance ensure lasting brightness and beauty. Compact design with a 6mm curved light surface delivers flawless linear illumination.

3. Built Tough: IP67 rating protects against saltwater, harsh chemicals, corrosion, flames, and UV rays.

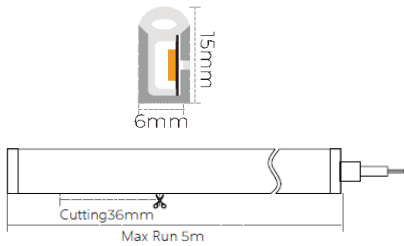

▼ Application

↳ **Infrastructure:** Airport ,Railway Station ,Bridge , Municipal building ,Tunnel

↳ **Urban:** Administrative Building , Commercial Building , Hotel , Mall

↳ **Cultural and Entertainment:** Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, PIs confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC


▼ Technical Data

Model	SIZE (mm)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	VOLT	Control	CUTTING (mm)	Remark
NEON-04A	6*15mm	Side Bending (Φ > 60-80mm)	6/8/10	>80	Mono 2700-6000K	500-700	DC24V	ON/OFF	36	standard 3pc clips/M

Notes: Mono (2700K,3000K,3500K,4000K,4500K,5000K, Red, Green, Blue, Amber), Tunable White (2700K-5000K), Chromatic (RGB, RGBW)

▼ Installation Method

1. Surface Mounted 2. Recessed Mounted

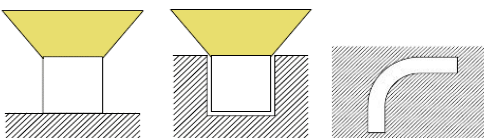

▼ Outlet Method

