

▼ 1313

### ▼ Characteristic



Neon Flex 3D Bend: Effortless Brilliance In any Shape

1. Bend & Install Your Way: Whole or cut-to-size for a perfect fit (no extra parts, maintains IP67 weatherproofing). Flexible even in extreme weather (-10° to +40°C).
2. 3D Creativity: Bends and curves on various surfaces, from flat walls to complex structures.
3. Durable & Vibrant: Eco-friendly materials and UV resistance for lasting beauty. T-shaped, 6mm light surface delivers flawless linear illumination. (Combines durability and lighting aspects)
4. Built Tough: IP67 rating protects against harsh environments: saltwater, chemicals, corrosion, flames, and UV rays.

### ▼ Application

I+ **Infrastructure**: Airport ,Railway Station ,Bridge , Municipal building ,Tunnel

I+ **Urban**: Administrative Building , Commercial Building , Hotel , Mall

I+ **Cultural and Entertainment**: Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, PIs confirm before ordering.




ON/OFF 0-10V DALI DMX TRIAC

### ▼ Technical Data

Model	SIZE (mm)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	VOLT	Control	CUTTING (mm)	Remark
NEON-06A	13*13mm	3D Bending	7/14	>80	Mono 2700-6000K	500-700	DC24V	ON/OFF	36	standard 3pc clips/M

### ▼ Installation Method

1. Surface Mounted
2. Recessed Mounted

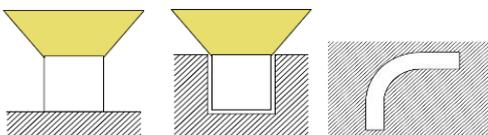

### ▼ Outlet Method

