
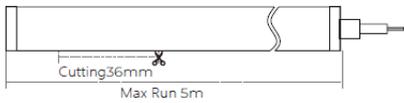



▼ 4535

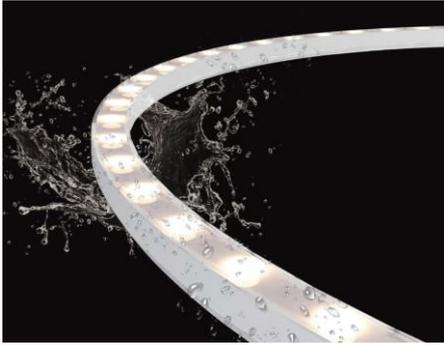

▼ Characteristic

1. Flexibility
 - Constructed with high-flexibility TPU material, allowing both horizontal and vertical bending.
 - Perfect for curves, columns, and irregular surfaces, supporting creative lighting designs.
2. Length Customization
 - Available in customized lengths up to 20 meters, minimizing joints and ensuring seamless light distribution.
 - Tailored to fit complex installations with ease.
3. Uniform Lighting Effect
 - Built-in high-brightness LED chips paired with professional optical design, ensuring soft and uniform wall-washing effects with no dark spots.
4. High Waterproof Rating
 - Double-sealed design with IP67 protection, making it suitable for wet, dusty, or extreme outdoor environments.
5. Easy Installation
 - Lightweight design with flexible mounting brackets and multiple fixing options for quick and hassle-free installation.

▼ Application

- I+Infrastructure: Airport ,Railway Station ,Bridge , Municipal building ,Tunnel
- I+Urban: Administrative Building , Commercial Building , Hotel , Mall
- I+Cultural and Entertainment: Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, PIs confirm before ordering.




ON/OFF 0-10V DALI DMX TRIAC

▼ Technical Data

Model	SIZE (mm)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	VOLT	Control	CUTTING (mm)	Remark
NEON-08E	45*35mm	Side Bending	24	>80	Mono 2700-6000K	768	20°,30°,60° ,20x45°	DC24V	ON/OFF	
NEON-08E	45*35mm	Side Bending	24	/	chromatic (RGB or RGBW)	864	20°,30°,60° ,20x45°	DC24V	DMX	

▼ Installation Method

1. Surface Mounted
2. Recessed Mounted

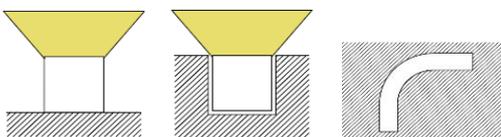

▼ Outlet Method

