



▼ Charaterastic

- ✦ The hidden structure design is perfectly combined with the curtain wall, and the transmission signal of the lamp adopts the dual-wire parallel control technology.
- ✦ Aluminum housing ,ultra white tempered safety glass, lens -PMMA; vertically tilt mounting bracket;
- ✦ Akzonobel anti-UV polyester powder, outdoor grade spray or oxidation treatment, UV protection for 5 years.
- ✦ Surface mounting.
- ✦ Working temperature is -50°C to 70°C



IP66

▼ Application

I+**Infrastructure**: Airport ,Railway Station ,Bridge , Municipal building ,Tunnel

I+**Urban**: Administrative Building , Commercial Building , Hotel , Mall


I+**Cultural and Entertainment**: Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, PIs confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC

▼ Family Matrix (Two difference size)

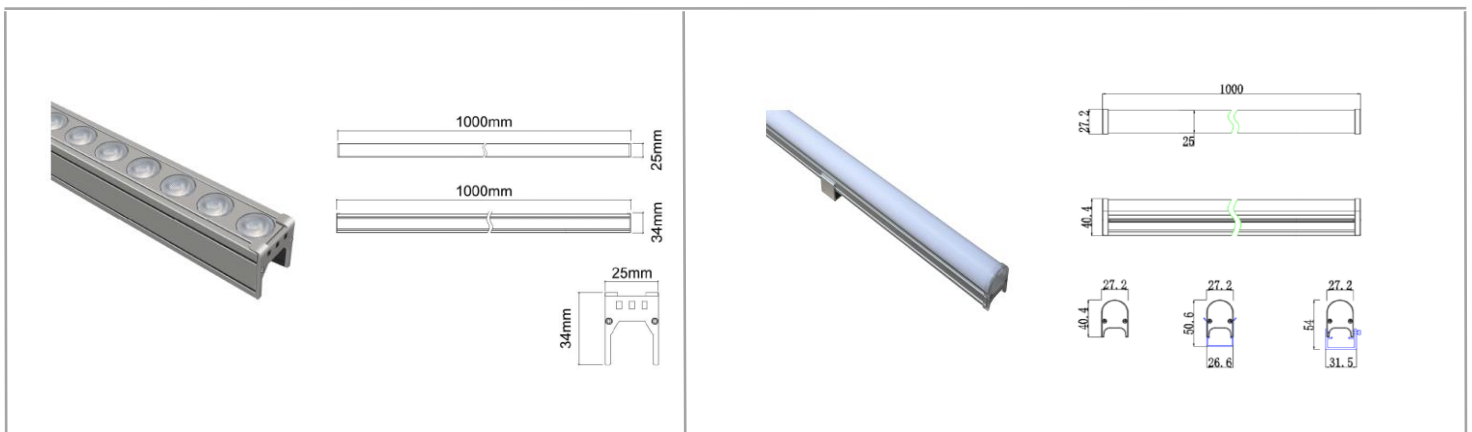

LL-01A

LL-02A

Notes: Standard Length 1000/500/300mm available.

▼ Naming scheme

