




▼ Characteristic

1. Exceptional Lighting Performance
 - High-efficiency LED delivers uniform, linear illumination.
 - Multiple beam angles for versatile lighting needs.
 - Glare-free optics ensure maximum visual comfort.
2. Durable and Weather-Resistant
 - Die-cast aluminum housing with corrosion-resistant coating.
 - IP65 waterproof and IK05 impact-resistant, perfect for outdoor use.
 - Tempered glass cover offers superior scratch and impact protection.
3. Effortless Installation
 - Compact, sleek design blends seamlessly with architectural elements.
 - Supports recessed or surface mounting for quick and easy setup.
4. Energy-Efficient and Sustainable
 - Low energy consumption with a lifespan exceeding 50,000 hours.
 - Environmentally friendly and low maintenance.

▼ Application

↑ Outdoor Occasion such as window sills, ledges, and architectural details in residential, commercial, and public spaces etc.

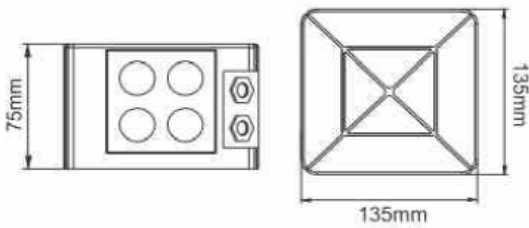

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC

▼ Technical Data

| Model | SIZE (mm) | POWER (W/M) | CRI | CCT (K) | LUMINOUS (LM/W) | B.angle | VOLT | Control | N.G | Remark |
|------------|-----------------|-------------|------|------------------|-----------------|-------------------------|-------|---------|-----|--------|
| WIN-03A-24 | L135xW135xH75mm | 24 W | > 80 | 3000K-5700K | 82 LM/W | 3/5/10/15/30/45 /60/90° | DC24V | ON/OFF | / | / |
| WIN-03A-24 | L135xW135xH75mm | 24 W | / | Chromatic (RGB) | 45 LM/W | 3/5/10/15/30/45 /60/90° | DC24V | DMX512 | / | / |
| WIN-03A-24 | L135xW135xH75mm | 24 W | / | Chromatic (RGBW) | 45 LM/W | 3/5/10/15/30/45 /60/90° | DC24V | DMX512 | / | / |

- ↑ Notes:
1. Finish: Black, and customized RAL available
 2. It has two size from 12W-24W.


▼ Simulation




▼ Project




▼ Photometric curve




15°




20°



30°



40°



60°