




### ▼ Characteristic

1. Exceptional Lighting Performance
  - High-efficiency LED delivers uniform, linear illumination.
  - Multiple beam angles for versatile lighting needs.
  - Glare-free optics ensure maximum visual comfort.
2. Durable and Weather-Resistant
  - Die-cast aluminum housing with corrosion-resistant coating.
  - IP65 waterproof and IK05 impact-resistant, perfect for outdoor use.
  - Tempered glass cover offers superior scratch and impact protection.
3. Effortless Installation
  - Compact, sleek design blends seamlessly with architectural elements.
  - Supports recessed or surface mounting for quick and easy setup.
4. Energy-Efficient and Sustainable
  - Low energy consumption with a lifespan exceeding 50,000 hours.
  - Environmentally friendly and low maintenance.

### ▼ Application

↑ Outdoor Occasion such as window sills, ledges, and architectural details in residential, commercial, and public spaces etc.

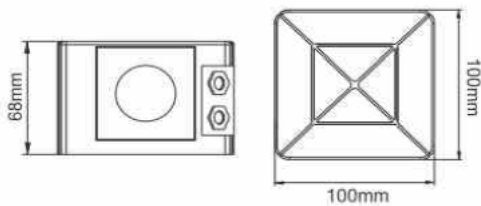

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC

### ▼ Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/W)	B.angle	VOLT	Control	N.G	Remark
WIN-03C-12	L100xW100xH68mm	12 W	> 80	3000K-5700K	82 LM/W	3/5/10/15/30/45 /60°	DC24V	ON/OFF	/	/
WIN-03C-12	L100xW100xH68mm	12 W	/	Chromatic (RGB)	45 LM/W	3/5/10/15/30/45 /60°	DC24V	DMX512	/	/
WIN-03C-12	L100xW100xH68mm	12 W	/	Chromatic (RGBW)	45 LM/W	3/5/10/15/30/45 /60°	DC24V	DMX512	/	/

- ↑ Notes:
1. Finish: Black, and customized RAL available
  2. It has two size from 12W-24W.

### ▼ Simulation



### ▼ Project



▼ Photometric curve

