

▼ Characteristic



1. Exceptional Lighting Performance
 - High-efficiency LED delivers uniform, linear illumination.
 - Multiple beam angles for versatile lighting needs.
 - Glare-free optics ensure maximum visual comfort.
2. Durable and Weather-Resistant
 - Die-cast aluminum housing with corrosion-resistant coating.
 - IP65 waterproof and IK05 impact-resistant, perfect for outdoor use.
 - Tempered glass cover offers superior scratch and impact protection.
3. Effortless Installation
 - Compact, sleek design blends seamlessly with architectural elements.
 - Supports recessed or surface mounting for quick and easy setup.
4. Energy-Efficient and Sustainable
 - Low energy consumption with a lifespan exceeding 50,000 hours.
 - Environmentally friendly and low maintenance.



▼ Application


I+ Outdoor Occasion such as a window sills, ledges, and architectural details in residential, commercial, and public spaces etc.

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available,
Pls confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC

▼ Family Matrix (Two size)

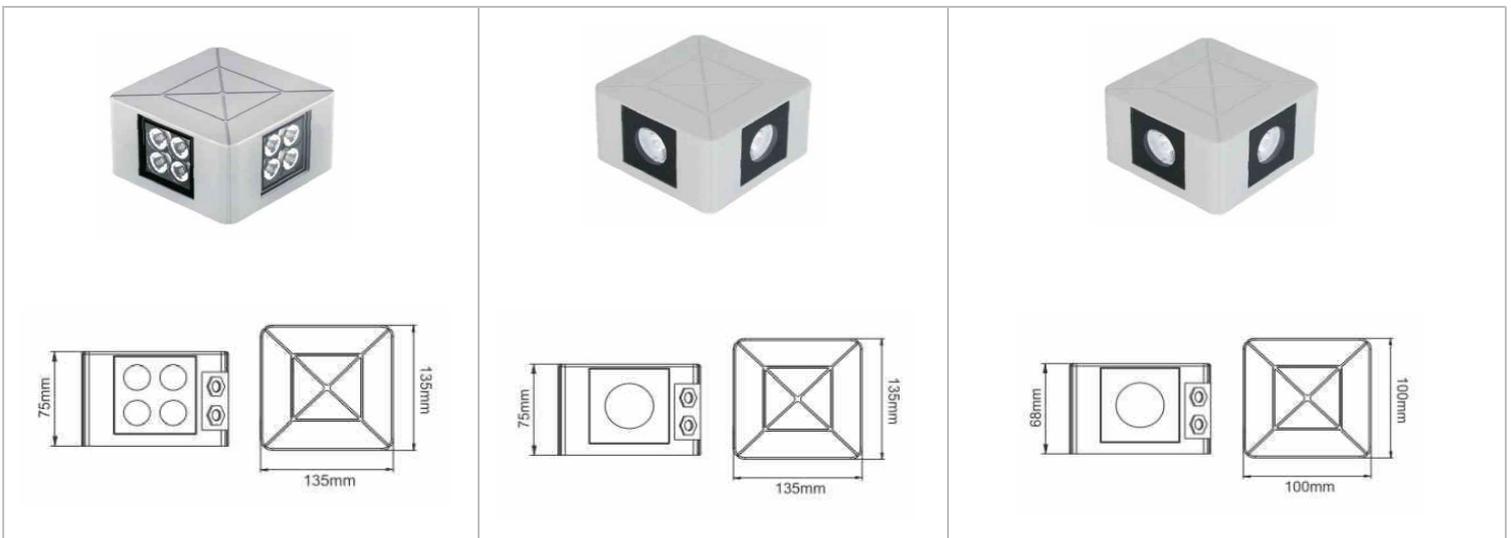

▼ Simulation

▼ Project




▼ Technical Data (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/W)	B.angle	VOLT	Control	N.G	Remark
WIN-03A-24	L135xW135xH75mm	24 W	> 80	3000K-5700K	82 LM/W	3/5/10/15/30/45 /60/90°	DC24V	ON/OFF	/	/
WIN-03A-24	L135xW135xH75mm	24 W	/	Chromatic (RGB)	45 LM/W	3/5/10/15/30/45 /60/90°	DC24V	DMX512	/	/
WIN-03A-24	L135xW135xH75mm	24 W	/	Chromatic (RGBW)	45 LM/W	3/5/10/15/30/45 /60/90°	DC24V	DMX512	/	/
WIN-03B-18	L135xW135xH75mm	18 W	> 80	3000K-5700K	82 LM/W	3/5/10/15/30/45 /60°	DC24V	ON/OFF	/	/
WIN-03B-18	L135xW135xH75mm	18 W	/	Chromatic (RGB)	45 LM/W	3/5/10/15/30/45 /60°	DC24V	DMX512	/	/
WIN-03B-18	L135xW135xH75mm	18 W	/	Chromatic (RGBW)	45 LM/W	3/5/10/15/30/45 /60°	DC24V	DMX512	/	/
WIN-03C-12	L100xW100xH68mm	12 W	> 80	3000K-5700K	82 LM/W	3/5/10/15/30/45 /60°	DC24V	ON/OFF	/	/
WIN-03C-12	L100xW100xH68mm	12 W	/	Chromatic (RGB)	45 LM/W	3/5/10/15/30/45 /60°	DC24V	DMX512	/	/
WIN-03C-12	L100xW100xH68mm	12 W	/	Chromatic (RGBW)	45 LM/W	3/5/10/15/30/45 /60°	DC24V	DMX512	/	/

- !+Notes:
 1. Finish: Black, and customized RAL available
 2. It has two size from 12W-24W.

▼ Photometric curve

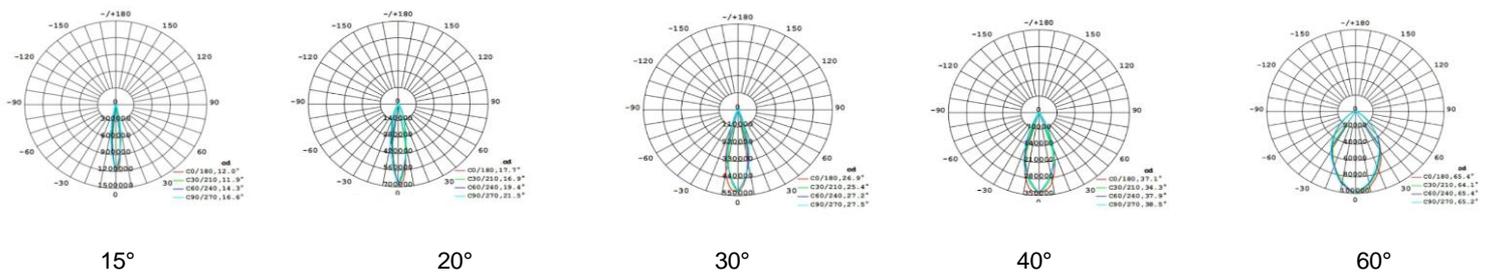

▼ Naming scheme

WIN-03A-12

