

▼ Characteristic



✦ The hidden structure design is perfectly combined with the curtain wall, and the transmission signal of the lamp adopts the dual-wire parallel control technology.

✦ Aluminum housing ,ultra white tempered safety glass, lens -PMMA; vertically tilt mounting bracket;

✦ Akzonobel anti-UV polyester powder, outdoor grade spray or oxidation treatment, UV protection for 5 years.

✦ Surface mounting.
✦ Working temperature is -50°C to 70°C

▼ Application

I+**Infrastructure:** Airport ,Railway Station ,Bridge , Municipal building ,Tunnel

I+**Urban:** Administrative Building , Commercial Building , Hotel , Mall

I+**Cultural and Entertainment:** Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site




IP66

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC

▼ Family Matrix (Five difference size)

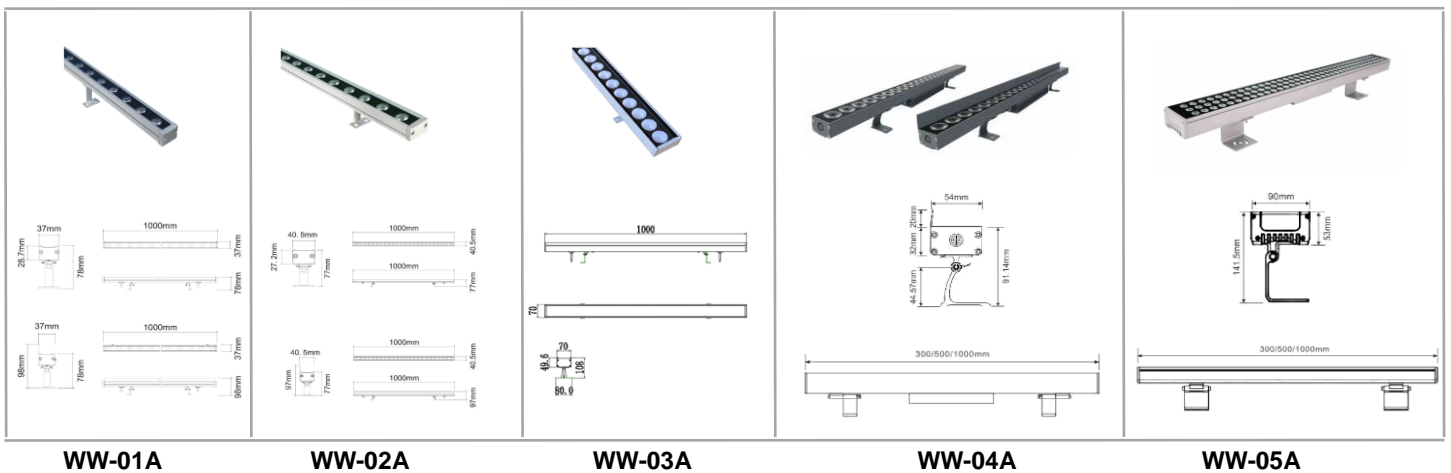

Notes: Standard Length 1000/500/300mm available.

▼ **Technical Data** (full sery)

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/W)	B.angle	VOLT	Control	N.G	Remark
WW-01A-24	L1000*W37*H78mm	18/24	> 80	Mono 2700-6500K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	ON/OFF	/	/
WW-01A-36	L1000*W37*H78mm	18/24/36	/	Tunable white 2700-6000K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-01A-36	L1000*W37*H78mm	18/24/36	/	chromatic (RGB or RGBW)	45 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-01B-12	L500*W37*H78mm	9/12	> 80	Mono 2700-6500K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	ON/OFF	/	/
WW-01B-18	L500*W37*H78mm	9/12/18	/	Tunable white 2700-6000K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-01B-18	L500*W37*H78mm	9/12/18	/	chromatic (RGB or RGBW)	45 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-01C-8	L300*W37*H78mm	6/8	> 80	Mono 2700-6500K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	ON/OFF	/	/
WW-01C-12	L300*W37*H78mm	6/8/12	/	Tunable white 2700-6000K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-01C-12	L300*W37*H78mm	6/8/12	/	chromatic (RGB or RGBW)	45 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-02A-24	L1000*W40.5*H77mm	24/36/48	> 80	Mono 2700-6500K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	ON/OFF	/	/
WW-02A-48	L1000*W40.5*H77mm	24/36/48	/	Tunable white 2700-6000K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-02A-48	L1000*W40.5*H77mm	24/36/48	/	chromatic (RGB or RGBW)	45 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-02B-12	L500*W40.5*H77mm	12/18/24	> 80	Mono 2700-6500K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	ON/OFF	/	/
WW-02B-24	L500*W40.5*H77mm	12/18/24	/	Tunable white 2700-6000K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-02B-24	L500*W40.5*H77mm	12/18/24	/	chromatic (RGB or RGBW)	45 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-02C-8	L300*W40.5*H77mm	8/12/16	> 80	Mono 2700-6500K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	ON/OFF	/	/
WW-02C-16	L300*W40.5*H77mm	8/12/16	/	Tunable white 2700-6000K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-02C-16	L300*W40.5*H77mm	8/12/16	/	chromatic (RGB or RGBW)	45 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-03A-120	L1000*W70*H108mm	80/120	> 80	Mono 2700-6500K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	ON/OFF	/	/
WW-03A-120	L1000*W70*H108mm	80/120	> 80	Tunable white 2700-6000K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-03A-120	L1000*W70*H108mm	80/120	/	chromatic (RGB or RGBW)	45 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-03B-120	L500*W70*H108mm	40/60	> 80	Mono 2700-6500K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	ON/OFF	/	/
WW-03B-120	L500*W70*H108mm	40/60	> 80	Tunable white 2700-6000K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-03B-120	L500*W70*H108mm	40/60	/	chromatic (RGB or RGBW)	45 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-03C-120	L300*W70*H108mm	27/40	> 80	Mono 2700-6500K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	ON/OFF	/	/
WW-03C-120	L300*W70*H108mm	27/40	> 80	Tunable white 2700-6000K	80 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-03C-120	L300*W70*H108mm	27/40	/	chromatic (RGB or RGBW)	45 LM/W	5/10/15/30/45/60/1 5x45/10x60°	DC24V	DMX512	/	/
WW-04A-48	L1000xW54xH32mm	48 W	> 80	3000K-5700K	80 LM/W	3/5/10/15/30/45/60/ 10x30°	AC85-265V	ON/OFF	/	/
WW-04A-60	L1000xW54xH32mm	60 W	/	Chromatic (RGB)	45 LM/W	3/5/10/15/30/45/60/ 10x30°	AC85-265V	DMX512	/	/
WW-04A-80	L1000xW54xH32mm	80 W	/	Chromatic (RGBW)	45 LM/W	3/5/10/15/30/45/60/ 10x30°	AC85-265V	DMX512	/	/
WW-04B-24	L500xW54xH32mm	24 W	> 80	3000K-5700K	80 LM/W	3/5/10/15/30/45/60/ 10x30°	AC85-265V	ON/OFF	/	/
WW-04B-30	L500xW54xH32mm	30 W	/	Chromatic (RGB)	45 LM/W	3/5/10/15/30/45/60/ 10x30°	AC85-265V	DMX512	/	/
WW-04B-30	L500xW54xH32mm	30 W	/	Chromatic (RGBW)	45 LM/W	3/5/10/15/30/45/60/ 10x30°	AC85-265V	DMX512	/	/

WW-04C-8	L300xW54xH32mm	8 W	> 80	3000K-5700K	80 LM/W	3/5/10/15/30/45/60/10x30°	AC85-265V	ON/OFF	/	/
WW-04C-24	L300xW54xH32mm	24 W	/	Chromatic (RGB)	45 LM/W	3/5/10/15/30/45/60/10x30°	AC85-265V	DMX512	/	/
WW-04C-24	L300xW54xH32mm	24 W	/	Chromatic (RGBW)	45 LM/W	3/5/10/15/30/45/60/10x30°	AC85-265V	DMX512	/	/
WW-05A-108	L1000xW90xH53mm	108 W	> 80	3000K-5700K	80 LM/W	5/10/15/30/45/60/15x45/10x60°	AC85-265V	ON/OFF	/	/
WW-05A-108	L1000xW90xH53mm	108 W	/	Chromatic (RGB)	45 LM/W	5/10/15/30/45/60/15x45/10x60°	AC85-265V	DMX512	/	/
WW-05A-144	L1000xW90xH53mm	144 W	/	Chromatic (RGBW)	45 LM/W	5/10/15/30/45/60/15x45/10x60°	AC85-265V	DMX512	/	/
WW-05B-54	L500xW90xH53mm	54 W	> 80	3000K-5700K	80 LM/W	5/10/15/30/45/60/15x45/10x60°	AC85-265V	ON/OFF	/	/
WW-05B-54	L500xW90xH53mm	54 W	/	Chromatic (RGB)	45 LM/W	5/10/15/30/45/60/15x45/10x60°	AC85-265V	DMX512	/	/
WW-05B-72	L500xW90xH53mm	72 W	/	Chromatic (RGBW)	45 LM/W	5/10/15/30/45/60/15x45/10x60°	AC85-265V	DMX512	/	/
WW-05C-36	L300xW90xH53mm	36 W	> 80	3000K-5700K	80 LM/W	5/10/15/30/45/60/15x45/10x60°	AC85-265V	ON/OFF	/	/
WW-05C-36	L300xW90xH53mm	36 W	/	Chromatic (RGB)	45 LM/W	5/10/15/30/45/60/15x45/10x60°	AC85-265V	DMX512	/	/
WW-05C-36	L300xW90xH53mm	48 W	/	Chromatic (RGBW)	45 LM/W	5/10/15/30/45/60/15x45/10x60°	AC85-265V	DMX512	/	/

I+Notes:

1. Finish: Gray, and customized RAL available.
2. 15 different size.
3. Notes: Mono (2700K,3000K,3500K,4000K,4500K,5700K) , Chromatic (RGB, RGBW)

▼ Naming scheme

WW-01A-24

