


▼ 1018



▼ Characteristic

Neon Flex Side Bend: Effortlessly Brilliant

1. Bend & Install Your Way: Whole or cut-to-size with no-fuss setup (maintains IP67 weatherproofing). Works even in extreme climates (-10° to +40°C).
2. Durable & Vibrant: Eco-friendly, UV-resistant construction ensures lasting brightness and beauty.
3. Flawless Linear Light: Delivers consistent illumination across the entire light surface.



▼ Application

✚ **Infrastructure:** Airport ,Railway Station ,Bridge , Municipal building ,Tunnel

✚ **Urban:** Administrative Building , Commercial Building , Hotel , Mall

✚ **Cultural and Entertainment:** Pavilion , Plaza ,Village ,Amusement park ,Monuments ,Cathedral ,Heritage site

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.



ON/OFF 0-10V DALI DMX TRIAC


▼ Technical Data

Model	SIZE (mm)	BENDING DIRECTION	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/M)	VOLT	Control	CUTTING (mm)	Remark
NEON-03D	10*18mm	Top Bending (Φ > 80-120mm)	10/12/15	>80	Mono 2700-6000K	700-950	DC24V	ON/OFF	50	standard 3pc clips/M
NEON-03D	10*18mm	Top Bending (Φ > 80-120mm)	10/12/15	>80	Tunable white 2700-6000K	700-950	DC24V	DMX	50	standard 3pc clips/M
NEON-03D	10*18mm	Top Bending (Φ > 80-120mm)	10/12/15	/	chromatic (RGB or RGBW)	300-450	DC24V	DMX	50	standard 3pc clips/M

Notes: Mono (2700K,3000K,3500K,4000K,4500K,5000K, Red, Green, Blue, Amber), Tunable White (2700K~5000K), Chromatic (RGB, RGBW)

▼ Installation Method

1. Surface Mounted
2. Recessed Mounted

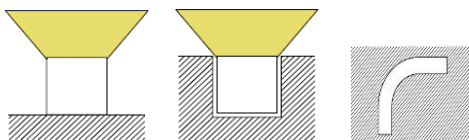

▼ Outlet Method

