



### ▼ Characteristic

1. Superior Optical Performance
  - High-efficiency LED with precise beam control, offering multiple beam angles and color temperatures (2700K/3000K/4000K).
  - Glare-free design for uniform and comfortable illumination.
2. Durable and Reliable
  - Die-cast aluminum housing with corrosion-resistant coating, suitable for indoor and outdoor use.
  - IP65/IP67 waterproof and IK08 impact-resistant for long-lasting performance.
3. Easy Installation
  - Supports recessed, surface-mounted, and wall-mounted options for versatile applications.
  - Lightweight design for hassle-free installation.
4. Smart Control
  - Compatible with DALI, DMX512, and 0-10V for dimming and dynamic lighting effects.
  - Sensor integration available for intelligent energy-saving solutions.


### ▼ Application

I<sup>3</sup>Architectural façades, Landscape lighting, Commercial spaces, and Residential settings etc.



ON/OFF 0-10V DALI DMX TRIAC

▼ "Non-dim/dim" and "Mono/Tunable white/chromatic" is available, Pls confirm before ordering.

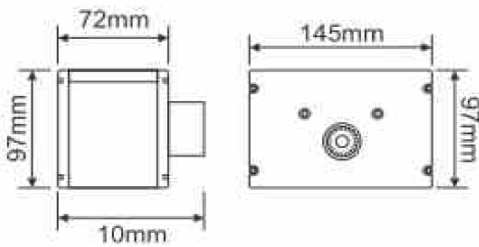

### ▼ Technical Data

Model	SIZE (mm)	POWER (W/M)	CRI	CCT (K)	LUMINOUS (LM/W)	B.angle	VOLT	Control	N.G	Remark
WL-02D-10	L72xW145xH97	10 W	/	3000K-5700K	82 LM/W	5/10/15/30/60°	AC220V	DMX512	/	Down
WL-02D-15	L72xW145xH97	15 W	> 80	Chromatic (RGB)	45 LM/W	5/10/15/30/60°	AC220V	ON/OFF	/	Down
WL-02D-15	L72xW145xH97	15 W	/	Chromatic (RGBW)	45 LM/W	5/10/15/30/60°	AC220V	DMX512	/	Down

!+Notes:

1. Finish: Black, and customized RAL available
2. It has four size with 4 different watt from 10W-48W.


### ▼ Simulation




### ▼ Project




▼ Photometric curve




10°



20°



30°



60°